

EF6809

8-BIT MICROPROCESSING UNIT

The EF6809 is a revolutionary high performance 8-bit microprocessor which supports modern programming techniques such as position independence, reentrancy, and modular programming.

This third generation addition to the 6800 Family has major architectural improvements which include additional registers, instructions, and addressing modes.

The basic instructions of any computer are greatly enhanced by the presence of powerful addressing modes. The EF6809 has the most complete set of addressing modes available on any 8-bit microprocessor today.

The EF6809 has hardware and software features which make it an ideal processor for higher level language execution or standard controller applications.

EF6800 COMPATIBLE

- Hardware — Interfaces with All 6800 Peripherals
- Software — Upward Source Code Compatible Instruction Set and Addressing Modes

ARCHITECTURAL FEATURES

- Two 16 Bit Index Registers
- Two 16 Bit Indexable Stack Pointers
- Two 8 Bit Accumulators can be Concatenated to Form One 16 Bit Accumulator
- Direct Page Register Allows Direct Addressing Throughout Memory

HARDWARE FEATURES

- On-Chip Oscillator (Crystal Frequency = 4 × E)
- DMA/BREQ Allows DMA Operation on Memory Refresh
- Fast Interrupt Request Input Stacks Only Condition Code Register and Program Counter
- MRDY Input Extends Data Access Times for Use with Slow Memory
- Interrupt Acknowledge Output Allows Vectoring by Devices
- Sync Acknowledge Output Allows for Synchronization to External Event
- Single Bus-Cycle RESET
- Single 5-Volt Supply Operation
- NMI Inhibited After RESET Until After First Load of Stack Pointer
- Early Address Valid Allows Use with Slower Memories
- Early Write Data for Dynamic Memories

SOFTWARE FEATURES

- 10 Addressing Modes
 - 6800 Upward Compatible Addressing Modes
 - Direct Addressing Anywhere in Memory Map
 - Long Relative Branches
 - Program Counter Relative
 - True Indirect Addressing
 - Expanded Indexed Addressing
 - 0-, 5-, 8-, or 16-Bit Constant Offsets
 - 8- or 16-Bit Accumulator Offsets
 - Auto Increment/Decrement by 1 or 2
- Improved Stack Manipulation
- 1464 Instructions with Unique Addressing Modes
- 8 × 8 Unsigned Multiply
- 16-Bit Arithmetic
- Transfer Exchange All Registers
- Push/Pull Any Registers or Any Set of Registers
- Load Effective Address


HMOS

(HIGH DENSITY N-CHANNEL, SILICON-GATE)

8-BIT MICROPROCESSING UNIT

CASES

CB-182

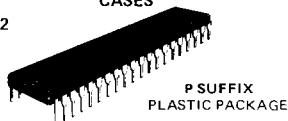

P SUFFIX
PLASTIC PACKAGE

JS SUFFIX
CERDIP PACKAGE

CS SUFFIX
CERAMIC PACKAGE

CB-521



FN SUFFIX
PLCC 44

CB-708



E SUFFIX
LCCC 44

Hi-Rel versions available - See chapter 9

PIN ASSIGNMENT

VSS	1	HALT
NMI	2	XTAL
IRO	3	EXTAL
FRC	4	RESET
BSD	5	MRDY
BA	6	IO
VCC	7	IE
A0	8	DMA/BREQ
A1	9	DP W
A2	10	DP O
A3	11	DO1
A4	12	DO2
A5	13	DO3
A6	14	DO4
A7	15	DO5
AB	16	DO6
A9	17	DO7
A10	18	DA15
A11	19	DA14
A12	20	DA13

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Storage N. Temp.	T _{ST}	-55 to +125	°C
Lead N. Temp.	T _{LEAD}	-55 to +125	°C
Operating Temperature Range	T _{OP}	-40 to +85	°C
EF6809, EF68A09, EF68B09			
EF6809, EF68A09, EF68B09, Visuffix	I _A	100 mA	
EF6809, EF68A09, Visuffix	P _{INT} + P _{PORT}	55 mW + 125 mW	
Storage Temperature Range	T _{ST}	-55 to +125	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance			
Ceramic	θ _{JA}	50	°C/W
Conduction	θ _{JA}	60	°C/W
Plastic	θ _{JA}	100	°C/W

POWER CONSIDERATIONS

The average chip junction temperature, T_J, in °C can be obtained from

$$T_J = T_A + (P_D \cdot \theta_{JA}) \quad (1)$$

Where:

T_A ≡ Ambient Temperature, °C

θ_{JA} ≡ Package Thermal Resistance, Junction to Ambient, °C/W

P_D ≡ P_{INT} + P_{PORT}

P_{INT} ≡ I_{CC} × V_{CC}, Watts - Chip Internal Power

P_{PORT} ≡ Port Power Dissipation, Watts - User Determined

For most applications P_{PORT} ≪ P_{INT} and can be neglected. P_{PORT} may become significant if the device is configured to drive Darlington bases or sink LED loads.

An approximate relationship between P_D and T_J if P_{PORT} is neglected is:

$$P_D = K - (T_J + 273) \quad (2)$$

Solving equations 1 and 2 for K gives:

$$K = P_D \cdot (T_A + 273) \cdot C_1 + \theta_{JA} \cdot P_D^2 \quad (3)$$

Where K is a constant pertaining to the particular part. K can be determined from equation 3 by measuring P_D at equilibrium for a known T_A. Using this value of K the values of P_D and T_J can be obtained by solving equations (1) and (2) iteratively for any value of T_A.


ELECTRICAL CHARACTERISTICS (V_{CC} = 5.0 V ± 5%, V_{SS} = 0, T_A = T_E to T_H unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Input High Voltage	V _{IH} V _{HP}	V _{SS} + 2.0 V _{SS} + 4.0	—	V _{CC} V _{CC}	V
Input Low Voltage	V _{IL}	V _{SS} - 0.3	—	V _{SS} + 0.8	V
Input Leakage Current	I _{IN}	—	—	2.5	μA
dc Output High Voltage	V _{OH}	V _{SS} + 2.4 V _{SS} + 2.4 V _{SS} + 2.4	— — —	—	V
dc Output High Voltage	D0-D7, R/W, Q, E AC A15, R/W, BA, BS				
dc Output Low Voltage	V _{OL}			V _{SS} + 0.5	V
dc Output Low Voltage	I _{OL} = 2.0 mA, V _{CC} = min				
Internal Power Dissipation (Measured at T _A = 0 °C in Steady State Operation)	P _{INT}			1.0	W
Capacitance*	C _{in} C _{out}	— 10 10 15	10 10 15	15	pF
Logic Inputs, EXTAL, XTAL					
I _{IN} = 0, T _A = 25 °C, f = 1.0 MHz	D0-D7, RESET A0 A15, R/W, BA, BS				
Frequency of Operation	I _{EXTAL}	0.4 0.4 0.4	— — —	4 6 8	MHz
Hi-Z (Off State) Input Current	D0-D7 A0 A15, R/W	— —	2.0 —	10 100	μA
I _{IN} = 0.4 to 2.4 V, V _{CC} = max	I _{SI}				

* Capacitances are periodically tested rather than 100% tested

EF6809, EF68A09, EF68B09 are designed to withstand up to 3000V HBM protection against damage due to electrostatic discharges. It is recommended that common precautions be taken to avoid application of any voltage higher than maximum rated voltages to the input impedance circuit. Resistive input protection is enhanced if unused inputs are tied to an appropriate logic voltage level such as either V_{SS} or V_{CC}.

FIGURE 1 -- BUS TIMING

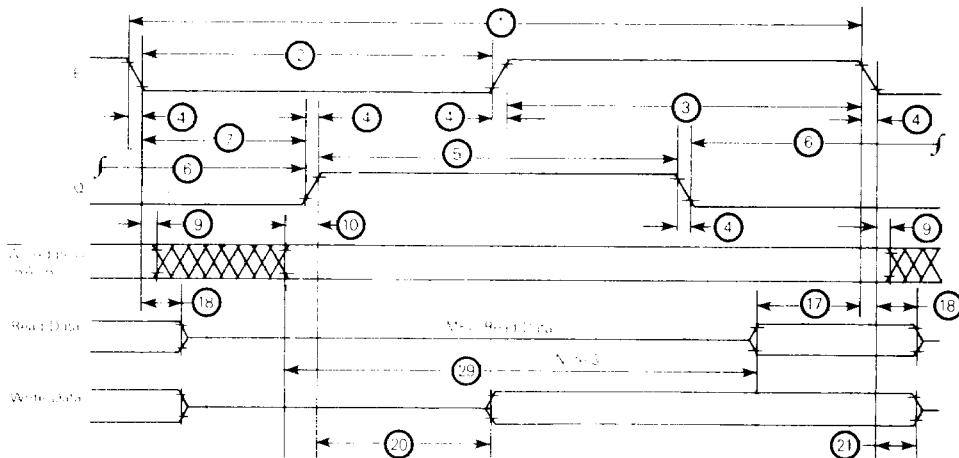

BUS TIMING CHARACTERISTICS (See Notes 1, 2, 3, 4, 5)

Ident. Number	Characteristics	Symbol	EF6809		EF68A09		EF68B09		Unit
			Min	Max	Min	Max	Min	Max	
1	Access Time (See Note 5)	t_{AC}	1.0	10	0.667	10	0.5	10	μs
2	Setup/Write Time	t_{SW}	430	5000	280	5000	210	5000	μs
3	Bus And Port Set-up	t_{PS}	450	15600	280	15700	220	15700	μs
4	Clock Recovery Time	t_{CR}	-	-	25	-	25	-	μs
5	Phase W1 Phase Setup	t_{PSW1}	430	5000	280	5000	210	5000	μs
6	Phase W2 Phase Setup	t_{PSW2}	450	15500	280	15700	220	15700	μs
7	Delay Between BA and BS	t_{DBS}	200	260	130	165	80	125	μs
8	Address Hold Time (See Note 4)	t_{AH}	20	-	20	-	20	-	μs
9	BA, BS, R/W, and Address Validity Hold Time	t_{AQ}	50	-	25	-	15	-	μs
10	Read Data Setup Time	t_{DSR}	80	-	60	-	40	-	μs
11	Read Data Hold Time	t_{DHR}	10	-	10	-	10	-	μs
12	Data Drive Time (See Note 6)	t_{DDQ}	-	250	-	140	-	110	μs
13	White Data Hold Time	t_{DHW}	30	-	30	-	30	-	μs
14	Usable Access Time (See Note 5)	t_{UAC}	600	-	440	-	330	-	μs
15	Processor Control Setup Time (MDR, RD, WR, RDY, DATA, RESET, Figures 6 and 7)	t_{PCS}	28	-	140	-	110	-	μs
16	Clock Oscillator Start Time (Figures 6 and 7)	t_{COS}	-	100	-	100	-	100	μs
17	Processor Control Release Time (Figures 6 and 7)	t_{PCR}	-	100	-	100	-	100	μs

* Address and data hold times are dependent on a determination that $V_{DD} = \text{V}_{DDH}$.

NOTES

1. V_{DD} logic levels shown are $V_L \leq 0.4 V$, $V_H \geq 2.4 V$, unless otherwise specified.
2. Measurement points shown are 0.6 V and 2.0 V, unless otherwise specified.
3. Usable access time is computed by $t_{UAC} = t_{AC} - t_{PS}$.
4. Read time for BA and BS is not specified.
5. Maximum f_{CY} during MDY or DMA-BREC is 16 μs .

FIGURE 2 - EF6809 EXPANDED BLOCK DIAGRAM


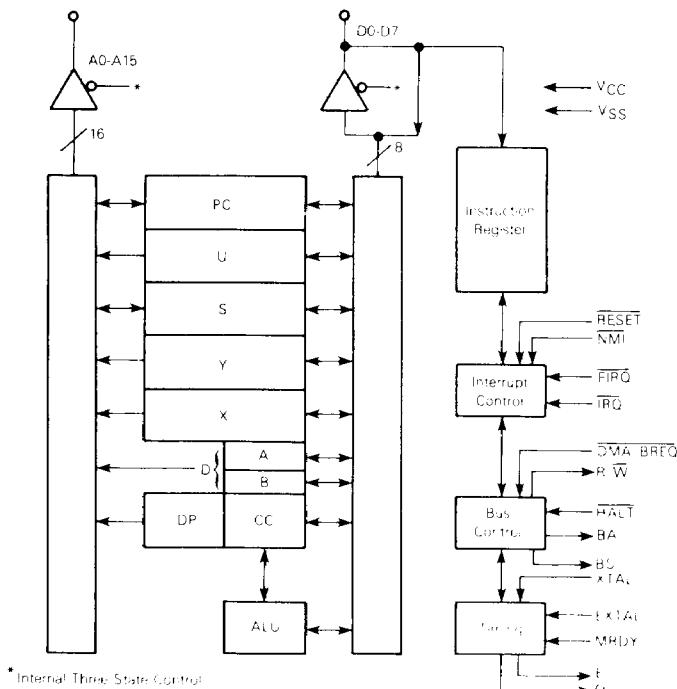


FIGURE 3 - BUS TIMING TEST LOAD

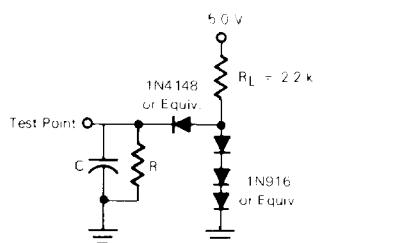

$C = 30 \text{ pF}$ for BA, BS
 130 pF for D0-D7, E, Q
 90 pF for A0-A15, R/W

$R = 11.7 \text{ k}\Omega$ for D0-D7
 $16.5 \text{ k}\Omega$ for A0-A15, E, Q, R/W
 $23 \text{ k}\Omega$ for BA, BS

PROGRAMMING MODEL

As shown in Figure 4, the EF6809 adds three registers to the set available in the EF6800. The added registers include a direct page register, the user stack pointer, and a second index register.

ACCUMULATORS (A, B, D)


The A and B registers are general purpose accumulators which are used for arithmetic calculations and manipulation of data.

Certain instructions concatenate the A and B registers to form a single 16-bit accumulator. This is referred to as the D register, and is formed with the A register as the most significant byte.

DIRECT PAGE REGISTER (DP)

The direct page register of the EF6809 serves to enhance the direct addressing mode. The content of this register appears at the higher address outputs (A8-A15) during direct addressing instruction execution. This allows the direct mode to be used at any place in memory, under program control. To ensure 6800 compatibility, all bits of this register are cleared during processor reset.

FIGURE 4 — PROGRAMMING MODEL OF THE MICROPROCESSING UNIT

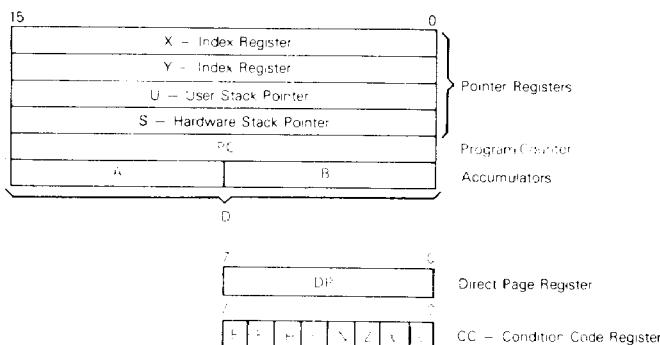

INDEX REGISTERS (X, Y)

The index registers are used in indexed mode of addressing. The 16 bit address in the register takes part in the calculation of effective addresses. This address may be used to point to data directly or may be modified by an optional constant or register offset. During some indexed modes, the contents of the index register are incremented or decremented to point to the next item of tabular type data. All four pointer registers (X, Y, U, S) may be used as index registers.

STACK POINTER (U,S)

The hardware stack pointer (S) is used automatically by the processor during subroutine calls and interrupts. The stack pointers of the EF6809 point to the top of the stack, in contrast to the EF6800 stack pointer, which pointed to the next free location on the stack. The user stack pointer (U) is controlled exclusively by the programmer. This allows arguments to be passed to and from subroutines with ease. Both stack pointers have the same indexed mode addressing capabilities as the X and Y registers, but also support **Push** and **Pull** instructions. This allows the EF6809 to be used efficiently as a stack processor, greatly enhancing its ability to support higher level languages and modular programming.


PROGRAM COUNTER

The program counter is used by the processor to point to the address of the next instruction to be executed by the processor. Relative addressing is provided allowing the program counter to be used like an index register in some situations.

CONDITION CODE REGISTER

The condition code register defines the state of the processor at any given time. See Figure 5.

FIGURE 5 — CONDITION CODE REGISTER FORMAT

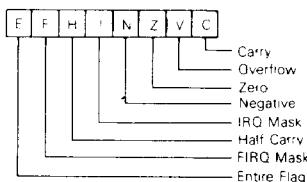

CONDITION CODE REGISTER DESCRIPTION

BIT 0 (C)

Bit 0 is the carry flag, and is usually the carry from the binary ALU. C is also used to represent a 'borrow' from subtract-like instructions (CMP, NEG, SUB, SBC) and is the complement of the carry from the binary ALU.

BIT 1 (V)

Bit 1 is the overflow flag, and is set to a one by an operation which causes a signed two's complement arithmetic overflow. This overflow is detected in an operation in which the carry from the MSB in the ALU does not match the carry from the MSB 1.

BIT 2 (Z)

Bit 2 is the zero flag, and is set to a one if the result of the previous operation was identically zero.

BIT 3 (N)

Bit 3 is the negative flag, which contains exactly the value of the MSB of the result of the preceding operation. Thus, a negative two's-complement result will leave N set to a one.

BIT 4 (I)

Bit 4 is the $\overline{\text{IRQ}}$ mask bit. The processor will not recognize interrupts from the $\overline{\text{IRQ}}$ line if this bit is set to a one. NMI, $\overline{\text{FIRO}}$, $\overline{\text{IRQ}}$, RESET, and SW1 all set I to a one. SW2 and SW3 do not affect I.

BIT 5 (H)

Bit 5 is the half-carry bit, and is used to indicate a carry from bit 3 in the ALU as a result of an 8 bit addition only (ADC or ADD). This bit is used by the DAA instruction to perform a BCD decimal add/adjust operation. The state of this flag is undefined in all subtract-like instructions.

BIT 6 (F)

Bit 6 is the $\overline{\text{FIRO}}$ mask bit. The processor will not recognize interrupts from the $\overline{\text{FIRO}}$ line if this bit is a one. NMI, $\overline{\text{FIRO}}$, SW1, and RESET all set F to a one. $\overline{\text{IRQ}}$, SW2, and SW3 do not affect F.

BIT 7 (E)

Bit 7 is the entire flag, and when set to a one indicates that the complete machine state (all the registers) was stacked, as opposed to the subset state (PC and CC). The E bit of the stacked CC is used on a return from interrupt (RTII) to determine the extent of the unstacking. Therefore, the current E left in the condition code register represents past action.

PIN DESCRIPTIONS**POWER (V_{SS} , V_{CC})**

Two pins are used to supply power to the part. V_{SS} is ground or 0 volts, while V_{CC} is +5.0 V $\pm 5\%$.

ADDRESS BUS (A0-A15)

Sixteen pins are used to output address information from the MPU onto the address bus. When the processor does not require the bus for a data transfer, it will output address FFFF16, R/W = 1, and BS = 0; this is a "dummy access" or VMA cycle. Addresses are valid on the rising edge of Q. All address bus drivers are made high impedance when output bus available (BA) is high. Each pin will drive one Schottky TTL load or four LSTTL loads, and 90 pF.

DATA BUS (D0-D7)

These eight pins provide communication with the system bidirectional data bus. Each pin will drive one Schottky TTL load or four LSTTL loads, and 130 pF.

READ/WRITE (R/W)

This signal indicates the direction of data transfer on the data bus. A low indicates that the MPU is writing data onto the data bus. R/W is made high impedance when BA is high. R/W is valid on the rising edge of Q.

RESET

A low level on this Schmitt-trigger input for greater than one bus cycle will reset the MPU, as shown in Figure 6. The reset vectors are fetched from locations FFFF16 and FFFF76 (Table 11) when interrupt acknowledge is true, (BA•RS = 1). During initial power on, the RESET line should be held low until the clock oscillator is fully operational. See Figure 7.

Because the EF6809 RESET pin has a Schmitt-trigger input with a threshold voltage higher than that of standard peripherals, a simple R-C network may be used to reset the entire system. This higher threshold voltage ensures that all peripherals are out of the reset state before the processor.

HALT


A low level on this input pin will cause the MPU to stop running at the end of the present instruction and remain halted indefinitely without loss of data. When halted, the BA output is driven high indicating the buses are high impedance. BS is also high which indicates the processor is in the halt or bus grant state. While halted, the MPU will not respond to external real time requests ($\overline{\text{FIRO}}$, $\overline{\text{IRQ}}$), although DMA/BREQ will always be accepted, and NMI or RESET can be latched for later response. During the halt state, Q and F continue to run normally. If the MPU is not running (RESET, DMA/BREQ), a halted state (BA•BS = 1) can be achieved by pulling HALT low while RESET is still low. If DMA/BREQ and HALT are both pulled low, the processor will reach the last cycle of the instruction (by reverse cycle stealing) where the machine will become halted. See Figure 8.

BUS AVAILABLE, BUS STATUS (BA, BS)

The bus available output is an indication of a memory control signal which makes the MOS buses of the MPU high impedance. This signal does not imply that the bus will be available for more than one cycle. When BA goes low, a dead cycle will elapse before the MPU acquires the bus.


The bus status output signal, when decoded with BA represents the MPU state valid with leading edge of Q.

MPU State		MPU State Definition
BA	BS	
0	0	Normal (Running)
0	1	Interrupt or Reset Acknowledge
1	0	Sync Acknowledge
1	1	Halt or Bus Grant Acknowledge

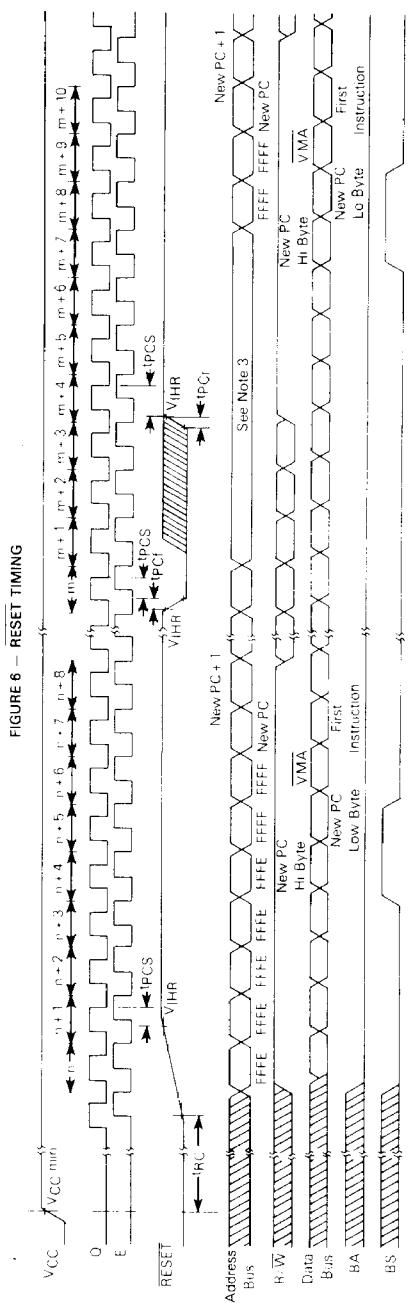



- NOTES:
1. Parts with date codes prefixed by 7F or 5A will come out of RESET one cycle sooner than shown.
 2. Timing measurements are referenced to and from a low voltage of 0.8 volts and a high voltage of 2.0 volts, unless otherwise noted.
 3. FFFF appears on the bus during RESET low time. Following the active transition of the RESET line, three more FFFF cycles will appear followed by the vector latch.

FIGURE 7 — CRYSTAL CONNECTIONS AND OSCILLATOR START UP

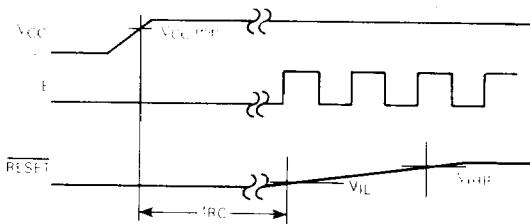

NOTE: Waveform measurements for all inputs and outputs are specified at logic high 2.0 V and logic low 0.8 V unless otherwise specified.

Y_1	C_{in}	C_{out}
8 MHz	18 pF	18 pF
6 MHz	20 pF	20 pF
4 MHz	24 pF	24 pF

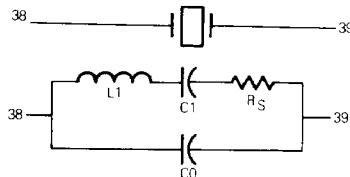

Nominal Crystal Parameters			
	3.58 MHz	4.00 MHz	6.0 MHz
R_S	60 Ω	50 Ω	30-50 Ω
C_0	3.5 pF	6.5 pF	4.6 pF
C_1	0.015 pF	0.025 pF	0.01-0.02 pF
Q	>40 k	>30 k	>20 k
8.0 MHz			

All parameters are 10%

NOTE: These are representative AT-cut crystal parameters only. Crystals of other types of cut may also be used.


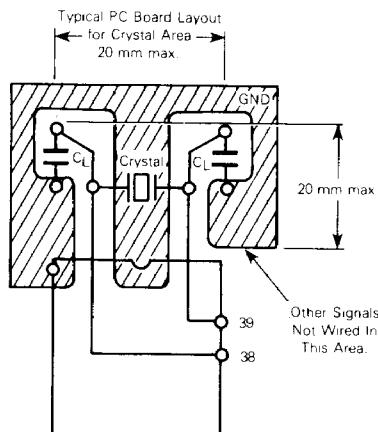


FIGURE 8 – HALT AND SINGLE INSTRUCTION EXECUTION FOR SYSTEM DEBUG

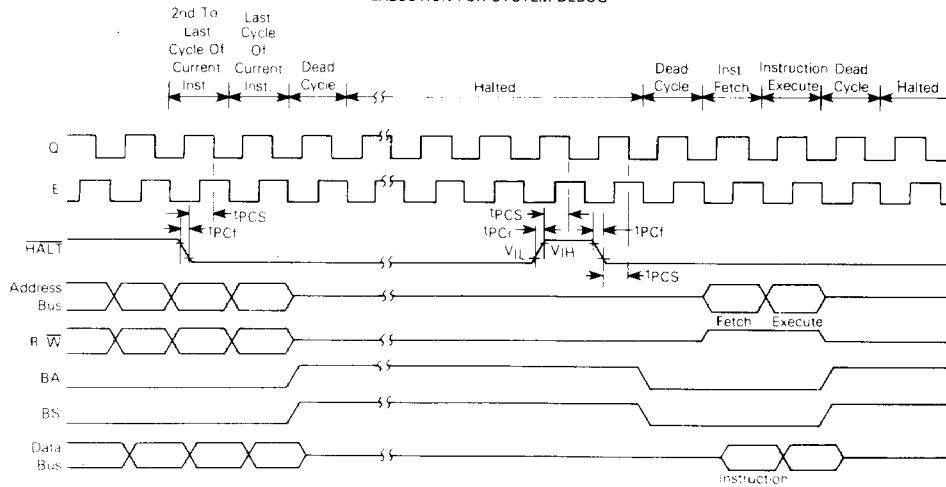

NOTE: Waveform measurements for all inputs and outputs are specified at logic high 2.0 V and logic low 0.8 V unless otherwise specified.

INTERRUPT ACKNOWLEDGE is indicated during both cycles of a hardware vector fetch (RESET, NMI, FIRQ, IRQ, SW1, SW2, SW3). This signal, plus decoding of the lower four address lines, can provide the user with an indication of which interrupt level is being serviced and allow vectoring by device. See Table 1.

SYNC ACKNOWLEDGE is indicated while the M6809 is waiting for external synchronization on an interrupt line.

HALT/BUS GRANT is true when the M6809 is in a halt or bus grant condition.

TABLE 1 – MEMORY MAP FOR INTERRUPT VECTORS

Memory Map For Vector Locations		Interrupt Vector Description
MS	LS	
FFFE	FFFF	RESET
FFFC	FFFD	NMI
FFFA	FFFB	SW1
FFFB	FFC9	IRQ
FFFB	FFC7	FIRQ
FFFA	FFC6	SW2
FFFA	FFC3	SW3
FFFC	FFC1	Reserved

NON MASKABLE INTERRUPT (NMI)*

A negative transition on this input requests that a non maskable interrupt sequence be generated. A non maskable

interrupt cannot be inhibited by the program, and also has a higher priority than FIRQ, IRQ, or software interrupts. During recognition of an NMI, the entire machine state is saved on the hardware stack. After reset, an NMI will not be recognized until the first program load of the hardware stack pointer (S). The pulse width of NMI low must be at least one E cycle. If the NMI input does not meet the minimum set up with respect to Q, the interrupt will not be recognized until the next cycle. See Figure 9.


FAST-INTERRUPT REQUEST (FIRQ)*

A low level on this input pin will initiate a fast interrupt sequence, provided its mask bit (F) in the CC is clear. This sequence has priority over the standard interrupt request (IRQ), and is fast in the sense that it stacks only the contents of the condition code register and the program counter. The interrupt service routine should clear the source of the interrupt before doing an RTI. See Figure 10.


INTERRUPT REQUEST (IRQ)*

A low level input on this pin will initiate an interrupt request sequence provided the mask bit (I) in the CC is clear. Since IRQ stacks the entire machine state, it provides a slower response to interrupts than FIRQ. IRQ also has a lower priority than FIRQ. Again, the interrupt service routine should clear the source of the interrupt before doing an RTI. See Figure 9.

*NMI, FIRQ, and IRQ requests are sampled on the falling edge of Q. One cycle is required for synchronization before these interrupts are recognized. Pending interrupt will not be serviced until completion of the current instruction unless a SYNC or CWA1 condition is present. If IRQ and FIRQ do not finish their completion of the current instruction, they may not be recognized. However, NMI is latched and need only remain low for one cycle. No interrupts are recognized if sampled between the falling edge of RESET and the rising edge of BS indicating RESET acknowledge.

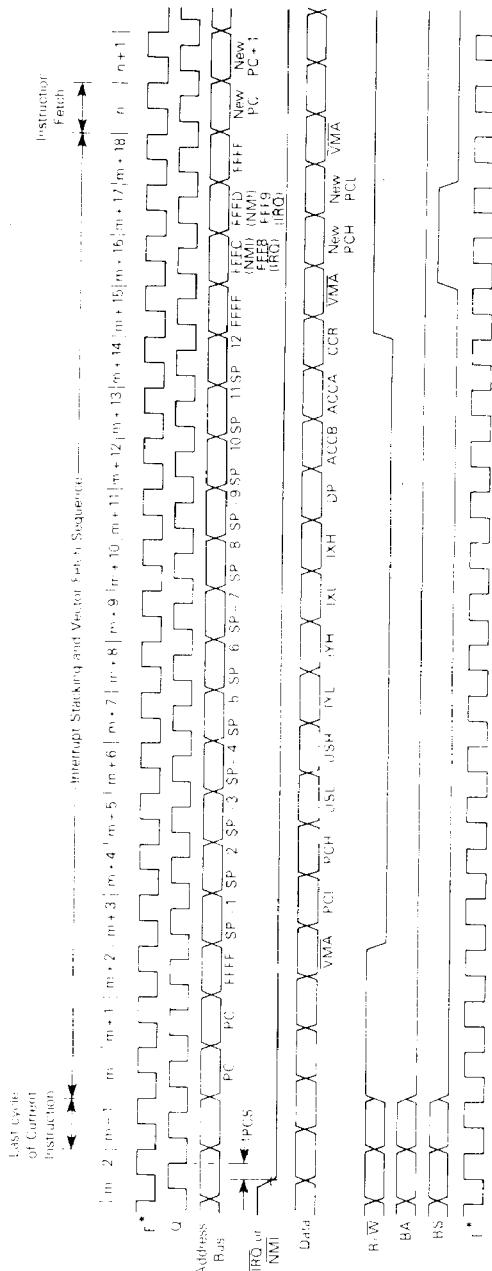FIGURE 9 - $\overline{\text{IRQ}}$ AND $\overline{\text{NMI}}$ INTERRUPT TIMING

NOTE: Waveform measurements for all inputs and outputs are specified at logic levels 2.0 V and logic low: 0.8 V unless otherwise specified.
 t_{clock} shown for reference only

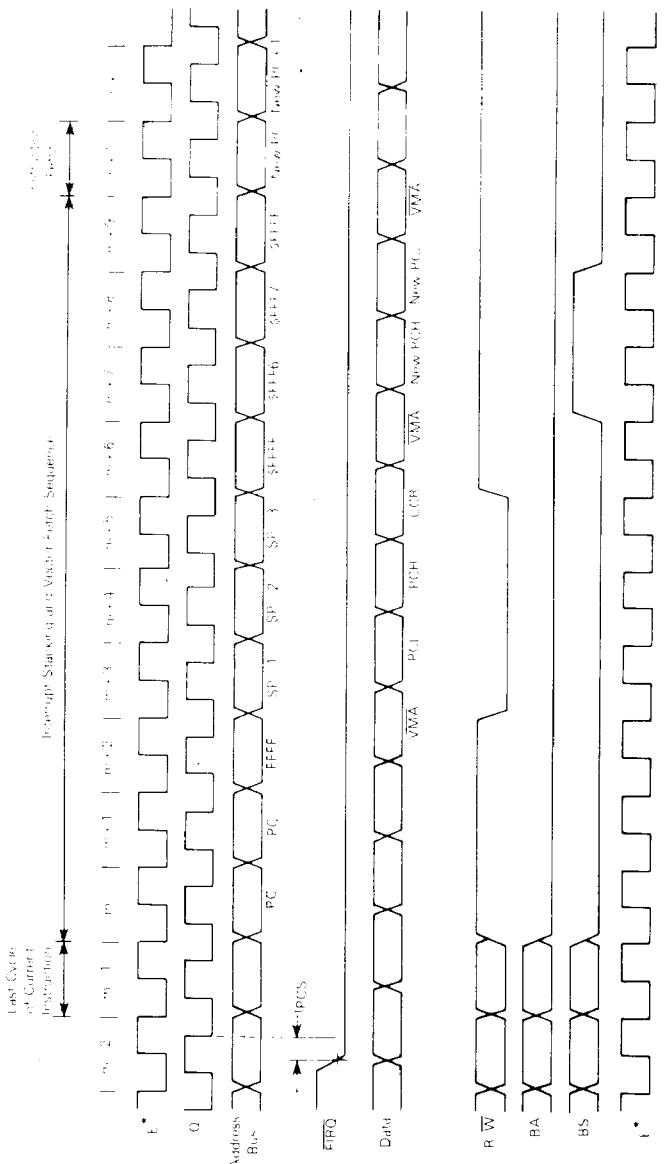FIGURE 10 - $\overline{\text{FIRQ}}$ INTERRUPT TIMING

XTAL, EXTAL

These inputs are used to connect the on-chip oscillator to an external parallel resonant crystal. Alternately, the pin EXTAL may be used as a TTL level input for external timing by grounding XTAL. The crystal or external frequency is four times the bus frequency. See Figure 7. Proper RF layout techniques should be observed in the layout of printed circuit boards.

E, Q

E is similar to the EF6800 bus timing signal phase 2. Q is a quadrature clock signal which leads E. Q has no parallel on the EF6800. Addresses from the MPU will be valid with the leading edge of Q. Data is latched on the falling edge of E. Timing for E and Q is shown in Figure 11.

MRDY*

This input control signal allows stretching of E and Q to extend data access time. E and Q operate normally while MRDY is high. When MRDY is low, E and Q may be stretched in integral multiples of quarter (1/4) bus cycles, thus allowing interface to slow memories, as shown in Figure 12(a). During non-valid memory access (VMA cycles), MRDY has no effect on stretching E and Q; this inhibits stretching the processor during "don't care" bus accesses. MRDY may also be

used to stretch clocks (for slow memory) when bus control has been transferred to an external device through the use of HALT and DMA_BREQ.

DMA_BREQ*


The DMA_BREQ input provides a method of suspending execution and acquiring the MPU bus for another use, as shown in Figure 13. Typical uses include DMA and dynamic memory refresh.

A low level on this pin will stop instruction execution at the end of the current cycle unless pre-empted by self-refresh. The MPU will acknowledge DMA_BREQ by setting BA and BS to a one. The requesting device will now have up to 16 bus cycles before the MPU retrieves the bus for self-refresh. Self-refresh requires one bus cycle with a leading and trailing dead cycle. See Figure 14. The self-refresh counter is only cleared if DMA_BREQ is inactive for two or more MPU cycles.

Typically, the DMA controller will request to via t_{BREQ} bus by asserting DMA_BREQ pin low on the leading edge of E. When the MPU replies by setting BA and BS to a one, that cycle will be a dead cycle used to transfer bus master ship to the DMA controller.

False memory addresses may be presented during self-refresh cycles by developing a system DMA_VTA signal with E = LOW in any cycle where BA has changed.

FIGURE 11 – E/Q RELATIONSHIP

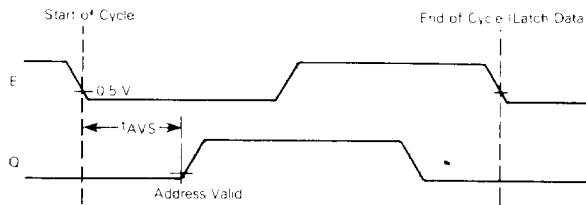

NOTE: Waveform measurements for all inputs and outputs are specified at logic high 2.0 V and logic low 0.8 V unless otherwise specified.

* The on board clock generator furnishes E and Q to both the system and the MPU. When MRDY is pulled low, both the system clocks and the internal MPU clocks are stretched. Assertion of DMA_BREQ input stops the internal MPU clocks while allowing the external system clocks to RUN (i.e., release the bus to a DMA controller). The internal MPU clocks resume operation after DMA_BREQ is released or after 16 bus cycles (14 DMA, two dead), whichever occurs first. While DMA_BREQ is asserted it is sometimes necessary to pull MRDY low to allow DMA to/from slow memory/peripherals. As both MRDY and DMA_BREQ control the internal MPU clocks, care must be exercised not to violate the maximum t_{cyc} specification for MRDY or DMA_BREQ. (Maximum t_{cyc} during MRDY or DMA_BREQ is 16 μ s.)

When BA goes low, either as a result of DMA-BREQ = 1 or an MPU self-refresh, the DMA device should be taken off the bus. Another bus cycle will happen before the MPU accesses memory to allow transfer of bus mastership without contention.

MPU OPERATION

During normal operation, the MPU fetches an instruction from memory and then executes the requested function.

This sequence begins after RESET and is repeated indefinitely unless altered by a special instruction or hardware occurrence. Software instructions that alter normal MPU operation are SW1, SW2, SW3, CWAI, RTI, and SYNC. An interrupt, HALT, or DMA-BREQ can also alter the normal execution of instructions. Figure 15 illustrates the flowchart for the EF6809.

FIGURE 12 — MRDY TIMING AND SYNCHRONIZATION

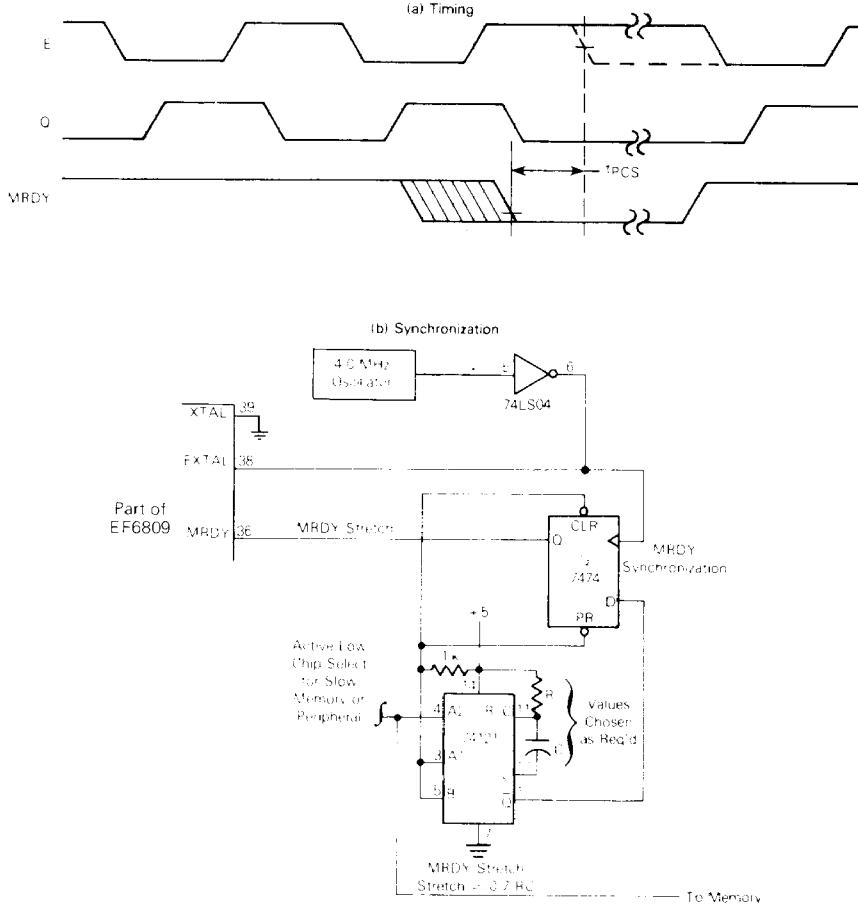
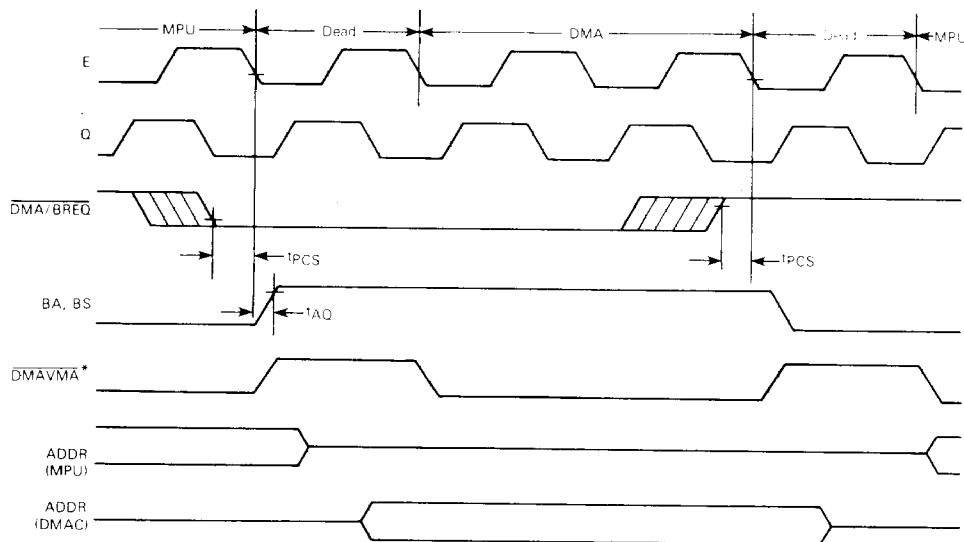
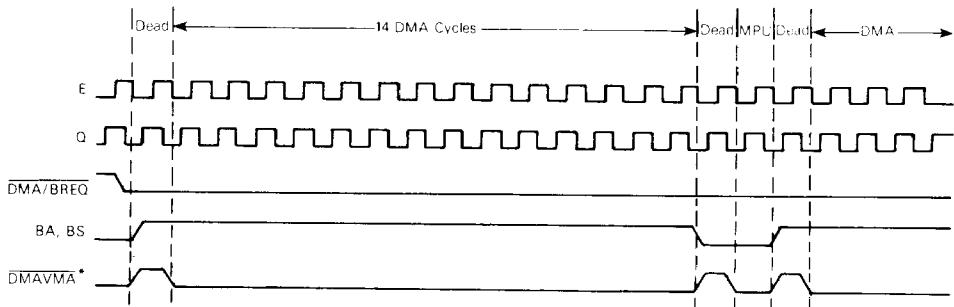



FIGURE 13 — TYPICAL DMA TIMING (< 14 CYCLES)

FIGURE 14 — AUTO-REFRESH DMA TIMING (> 14 CYCLES)
(REVERSE CYCLE STEALING)

* DMAVMA is a signal which is developed externally, but is a system requirement for DMA

NOTE: Waveform measurements for all inputs and outputs are specified at logic high 2.0 V and logic low 0.8 V unless otherwise specified.

FIGURE 15 – FLOWCHART FOR EF6809 INSTRUCTIONS

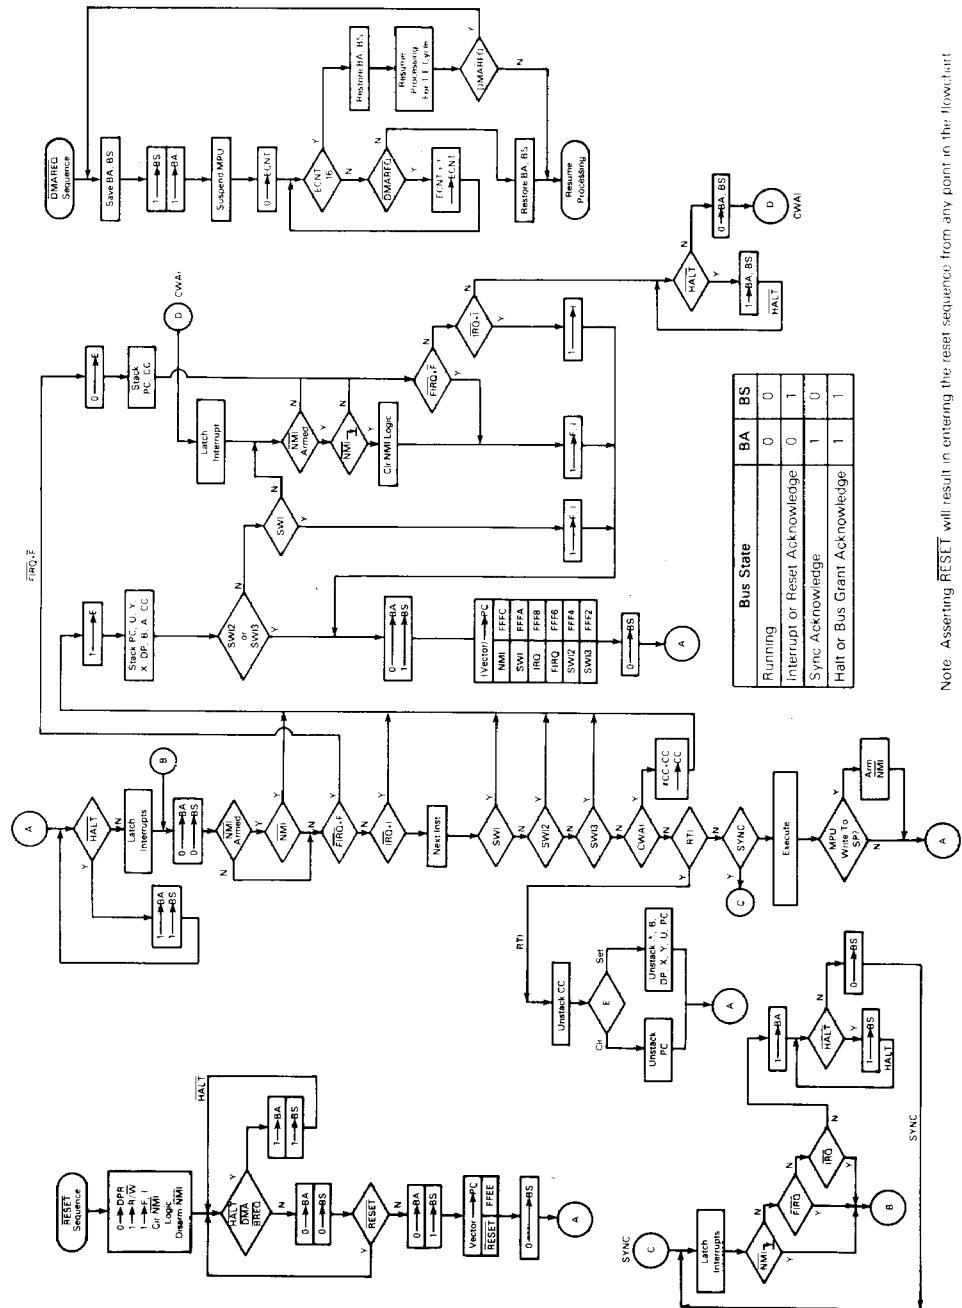

ADDRESSING MODES

The basic instructions of a computer are greatly enhanced by the presence of powerful addressing modes. The EF6809 has the most complete set of addressing modes available on any microcomputer today. For example, the EF6809 has 59 basic instructions, however it recognizes 1464 different variations of instructions and addressing modes. The addressing modes support modern programming techniques. The following addressing modes are available on the EF6809:

- Inherent (includes accumulator)
- Immediate
- Extended
 - Extended Indirect
- Direct
- Register
- Indexed
 - Zero Offset
 - Constant Offset
 - Accumulator Offset
 - Auto Increment Decrement
 - Indexed Indirect
- Relative
 - Short Long Relative Branching
 - Program Counter Relat. w/ Addressing

INHERENT (INCLUDES ACCUMULATOR)

In this addressing mode, the opcode of the instruction contains all the address information necessary. Examples of inherent addressing are ABX, DAA, SWI, ASRA, and CLR8.

IMMEDIATE ADDRESSING

In immediate addressing, the effective address of the data is the location immediately following the opcode, i.e., the data to be used in the instruction immediately following the opcode of the instruction. The EF6809 uses 8 bit B and 16 bit immediate values depending on the size of argument specified by the opcode. Examples of instructions using immediate addressing are:

```
LDA #$20
LDX #$FOOX
LDY #CAT
```

NOTE

signifies immediate addressing. \$ signifies direct decimal value.

EXTENDED ADDRESSING

In extended addressing, the contents of the two bytes immediately following the opcode fully specify the 16 bit effective address used by the instruction. Note that the address generated by an extended instruction defines an absolute address and is not position independent. Examples of extended addressing include:

```
LDA CAT
STX MOUSE
LDI $2000
```

EXTENDED INDIRECT As in the standard case of indexed addressing (discussed below), one byte of address can be added to extended addressing to extend indirect, the two bytes following the postbyte of an indexed instruction contain the address of the data.

```
LDA [CAT]
LDX [$FFFF]
STU <DOG,
```

DIRECT ADDRESSING

Direct addressing is similar to extended addressing except that only one byte of address follows the opcode. This byte specifies the lower eight bits of the address to be used. The upper eight bits of the address are supplied by the direct page register. Since only one byte of address is required in direct addressing, this mode requires less memory and executes faster than extended addressing. Of course, only 256 locations per page can be accessed without redefining the contents of the DP register. Since the DP register is set to \$00 on reset, direct addressing on the EF6809 is compatible with direct addressing on the 6800. Indirect is not allowed in direct addressing. Some examples of direct addressing are:

```
LDA $P
SETDP $10; assembler directive
LDB $10
LDI <CAT
```

NOTE

< is an assembler directive which forces direct addressing.

REGISTER ADDRESSING

Some opcodes are followed by a byte that defines a register or set of registers to be used by the instruction. This is called a postbyte. Some examples of register addressing are:

TFR	X, Y	Transfers X into Y
EXG	A, B	Exchanges A with B
PSHS	A, B, X, Y	Push Y, X, B and A onto S
PULU	X, Y, D	Pull D, X, and Y from U

INDEXED ADDRESSING

In all indexed addressing, one of the pointer registers X, Y, U, S, and sometimes PC is used in a calculation of the effective address of the operand to be used by the instruction. Five basic types of indexing are available and are discussed below. The postbyte of an indexed instruction specifies the basic type and variation of the addressing mode as well as the pointer register to be used. Figure 16 lists the legal formats for the postbyte. Table 2 gives the assembler form and the number of cycles and bytes added to the basic values for indexed addressing for each variation.

FIGURE 16 – INDEXED ADDRESSING POSTBYTE
REGISTER BIT ASSIGNMENTS

Postbyte Register Bit								Indexed Addressing Mode
7	6	5	4	3	2	1	0	
0	R	R	d	d	d	d	EA = ,R + 5 Bit Offset	
1	R	R	0	0	0	0	,R +	
1	R	R	i	0	0	0	,R + *	
1	R	R	0	0	0	1	, - R	
1	R	R	i	0	0	1	, - R	
1	R	R	i	0	1	0	EA = ,R + 0 Offset	
1	R	R	i	0	1	0	EA = ,R + ACCB Offset	
1	R	R	i	0	1	0	EA = ,R + ACCA Offset	
1	R	R	i	1	0	0	EA = ,R + 8 Bit Offset	
1	R	R	i	1	0	0	EA = ,R + 16 Bit Offset	
1	R	R	i	1	0	1	EA = ,PC + D Offset	
1	x	x	i	1	1	0	EA = ,PC + 8 Bit Offset	
1	x	x	i	1	1	0	EA = ,PC + 16 Bit Offset	
1	R	R	i	1	1	1	EA = [,Address]	

Addressing Mode Field

Indirect Field
(Sign bit when b7 = 0)

Register Field RR

x = Don't Care
d = Offset Bit
0 = Not Indirect
i = 1 = Indirect

ZERO-OFFSET INDEXED – In this mode, the selected pointer register contains the effective address of the data to be used by the instruction. This is the fastest indexing mode.

Examples are:

LDD O,X
LDA S

CONSTANT OFFSET INDEXED – In this mode, a two's complement offset and the contents of one of the pointer registers are added to form the effective address of the operand. The pointer register's initial content is unchanged by the addition.

Three sizes of offsets are available:

5 bit (-16 to +15)
8 bit (-128 to +127)
16 bit (-32768 to + 32767)

The two's complement 5-bit offset is included in the postbyte and, therefore, is most efficient in use of bytes and cycles. The two's complement 8-bit offset is contained in a single byte following the postbyte. The two's complement 16-bit offset is in the two bytes following the postbyte. In most cases the programmer need not be concerned with the size of this offset since the assembler will select the optimal size automatically.

Examples of constant-offset indexing are

LDA 23,X
LDX -2,S
LDY 300,X
LDU CAT,Y

TABLE 2 – INDEXED ADDRESSING MODE

Type	Forms	Non Indirect			Indirect			+	-	#
		Assembler Form	Postbyte Opcode	+ ~#	Assembler Form	Postbyte Opcode	+ ~#			
Constant Offset From R	No Offset	,R	1RR00100	0 0	[,R]	1RR10100	3 0			
I2s Complement Offsets	5-Bit Offset	n, R	0RHnnnnn	1 0						
	8-Bit Offset	n, R	1RR01000	1 1	[n, R]	1RR11000	4 1			
	16-Bit Offset	n, R	1RR01001	4 2	[n, R]	1RR11001	7 2			
Accumulator Offset From R	A Register Offset	A, R	1RR00110	1 0	[A, R]	1RR10110	4 0			
I2s Complement Offsets	B Register Offset	B, R	1RR00101	1 0	[B, R]	1RR10101	4 0			
	D Register Offset	D, R	1RR01011	4 0	[D, R]	1RR11011	7 0			
Auto Increment/Decrement R	Increment By 1	,R +	1RR00000	2 0						
	Increment By 2	,R + +	1RR00001	3 0	[,R + +]	1RR10001	6 0			
	Decrement By 1	,- R	1RR00010	2 0						
	Decrement By 2	,- R	1RR00011	3 0	[, - R]	1RR10011	6 0			
Constant Offset From PC	8-Bit Offset	n, PCR	1xx01100	1 1	[n, PCR]	1xx11100	4 1			
(2s Complement Offsets)	16-Bit Offset	n, PCR	1xx01101	5 2	[n, PCR]	1xx11101	8 2			
Extended Indirect	16-Bit Address	-	-	-	[n]	10011111	5 2			

R = X, Y, U, or S

x = Don't Care

RR

00=x

01=Y

10=U

t1=S

+ and - indicate the number of additional cycles and bytes for the particular variation

ACCUMULATOR-OFFSET INDEXED This mode is similar to constant offset indexed except that the two's complement value in one of the accumulators (A, B, or D) and the contents of one of the pointer registers are added to form the effective address of the operand. The contents of both the accumulator and the pointer register are unchanged by the addition. The positive specifies which accumulator to use as an offset and no additional bytes are required. The advantage of an accumulator offset is that the value of the offset can be calculated by a program at run-time. Some examples are:

```
LDA B,Y
LDX D,Y
LEAX B,X
```

AUTO INCREMENT/DECREMENT INDEXED In the auto increment addressing mode, the pointer register contains the address of the operand. Then, after the pointer register is used it is incremented by one or two. This addressing mode is useful in stepping through tables, moving data, or for the creation of software stacks. In auto decrement, the pointer register is decremented prior to use as the address of the data. The use of auto decrement is similar to that of auto increment, but the tables, etc., are scanned from the high to low addresses. The size of the increment/decrement can be either one or two to allow for tables of either 8- or 16-bit data to be accessed and is selectable by the programmer. The pre-decrement, post increment nature of these modes allows them to be used to create additional software stacks that behave identically to the U and S stacks.

Some examples of the auto increment/decrement addressing modes are

```
LDA ,X+
STD ,Y,+ +
LDB , - Y
LDX , - S
```

Care should be taken in performing operations on 16-bit pointer registers (X, Y, U, S) where the same register is used to calculate the effective address.

Consider the following instruction:

```
STX 0,X+ + (X initialized to 0)
```

The desired result is to store zero in locations \$0000 and \$0001 then increment X to point to \$0002. In reality, the following occurs:

0→temp	calculate the EA; temp is a holding register
X+2→X	perform auto increment
X→(temp)	do store operation

INDEXED INDIRECT – All of the indexing modes, with the exception of auto increment/decrement by one or a ±4-bit offset, may have an additional level of indirection specified. In indirect addressing, the effective address is contained at the location specified by the contents of the index register plus any offset. In the example below, the A accumulator is loaded indirectly using an effective address calculated from the index register and an offset

Before Execution		
A = XX (don't care)		
X = \$F000		
S0100	LDA (\$10,X)	EA is now SF010
SF010		
\$F1	SF1	\$F150 is now the new EA
\$50	\$50	
SF150		
SAA		
After Execution		
A = SAA		Actual Data Loaded
X = \$F000		

All modes of indexed indirect are included except those which are meaningless (e.g., auto increment/decrement by one indirect). Some examples of indexed indirect are

```
LDA [X]
LDD [10,S]
LDA [B,Y]
LDI [X+ +]
```

RELATIVE ADDRESSING

The bytes following the branch opcode is interpreted as a signed offset which may be added to the program counter. If the branch condition is true, then the calculated address [PC + signed offset] is loaded into the program counter. Program execution continues at the new location as indicated by the PC. short form type offset and long two bytes offset relative addressing modes are available. All of memory can be reached in long relative addressing as an effective address is interpreted modulo 2^{16} . Some examples of relative addressing are

BEQ	CAT	(short)	
BGT	DOG	(short)	
CAT	LB EQ	RAT	(long)
DOG	LB GT	RABBIT	(long)
•	•	•	
RAT	NOP		
RABBIT	NOP		

PROGRAM COUNTER RELATIVE The PC can be used as the pointer register with 8- or 16-bit signed offsets. As in relative addressing, the offset is added to the current PC to create the effective address. The effective address is then used as the address of the operand or data. Program counter relative addressing is used for writing position independent programs. Tables related to a particular routine will maintain the same relationship after the routine is copied if referenced relative to the program counter. Examples are

```
LDA [CAT, PCR]
LEAX [TABLE, PCR]
```

Since program counter relative is a type of indexing, an additional level of indirection is available

```
LDA [CAT, PCR]
LDI [DOG, PCR]
```

INSTRUCTION SET

The instruction set of the EF6809E is similar to that of the 6800 and is upward compatible at the source code level. The number of opcodes has been reduced from 72 to 59 but because of the expanded architecture and additional addressing modes, the number of available opcodes (with different addressing modes) has risen from 197 to 1464.

Some of the new instructions are described in detail below.


PSHU/PSHS

The push instructions have the capability of pushing onto either the hardware stack (S) or user stack (U) any single register or set of registers with a single instruction.

PULU/PULS

The pul instructions have the same capability of the push instruction, in reverse order. The byte immediately following the push or pull opcode determines which register or registers are to be pushed or pulled. The actual push/pull sequence is fixed; each bit defines a unique register to push or pull, as shown below.

Push/Pull Postbyte

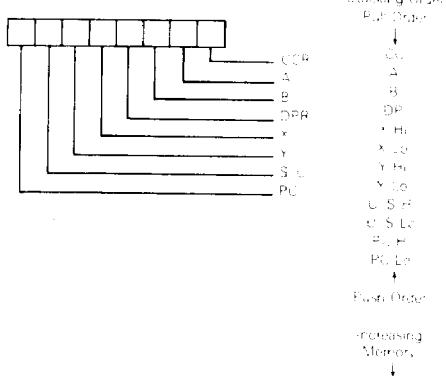

TFR/EXG

Within the EF6809E, any register may be transferred to or exchanged with another of like size, i.e., 8 bit to 8 bit or 16 bit to 16 bit. Bits 4-7 of postbyte define the source register, while bits 0-3 represent the destination register. These are denoted as follows:

Transfer Exchange Postbytes

Source	Destination
Register Field	
0000 = D, A, B	1000 = A
0001 = X	1101 = B
0010 = Y	1010 = CCR
0011 = U	1011 = DPR
0100 = S	
0101 = PC	

NOTE

All other combinations are undefined and INVALID.

LEAX/LEAY/LEAU/LEAS

The LEA (load effective address) works by calculating the effective address used in an indexed instruction and stores that address value, rather than the data at that address, in a pointer register. This makes all the features of the internal addressing hardware available to the programmer. Some of the implications of this instruction are illustrated in Table 3.

The LEA instruction also allows the user to access data and tables in a position independent manner. For example:

LEAX MSG1 PCR
LBSR PDATA (print message routine)

•
•

MSG1 ECA MESSAGE

This sample program prints "MESSAGE" by writing MSG1, PCR, the assembler computes the distance between the present address and MSG1. This result is placed as a constant into the LEAX instruction which will be indexed from the PC value at the time of execution. No matter where the code is located when it is executed, the computed offset from the PC will put the absolute address of MSG1 into the X pointer register. This code is totally position independent.

The LEA instructions are very powerful and use an internal holding register temporary. Care must be exercised when using the LEA instructions with the auto-increment and auto-decrement addressing modes due to the sequence of internal operations. The LEA internal sequence is outlined as follows:

LEAa,b:
1. sum of the 16 bit pointer registers X, Y,
or S may be substituted for a and b
2. b ← temp calculate the EA
3. b ← b + 1 ← b modified to b+1 postincrement
3. temp ← a load a

LEAa .. b

1. b ← 1 ← temp calculate EA with predecrement
2. b ← 1 ← b modify b predecrement
3. temp ← a load a

TABLE 3 - LEA EXAMPLES

Instruction	Operation	Comment
LEAX 10 X : X + 10 → X :	Adds 5 Bit Constant to X	
LEAX 500,X : X + 500 → X :	Adds 16 Bit Constant 500 to X	
LEAY A,Y : Y + A → Y	Adds 8 Bit A Accumulator to Y	
LEAY D,Y : Y + D → Y	Adds 16 Bit D Accumulator to Y	
LEAU -10,U : U - 10 → U :	Subtracts 10 from U	
LEAS -10,S : S - 10 → S :	Used to Reserve Area on Stack	
LEAS -10,S : S + 10 → S :	Used to Clear Up Stack	
LEAX 5,S : S + 5 → X :	Transfers As A=5 A=5 Adds	

Auto increment by two and auto decrement by two instructions work similarly. Note that LEAX ,X+ does not change X, however, LEAX,-X does decrement. LEAX 1,X should be used to increment X by one.

MUL

Multiplies the unsigned binary numbers in the A and B accumulators and places the unsigned result into the 16 bit D accumulator. The unsigned multiply also allows multiple-precision multiplications.

LONG AND SHORT RELATIVE BRANCHES

The EF6809 has the capability of program counter relative branching throughout the entire memory map. In this mode, if the branch is to be taken, the 8- or 16-bit signed offset is added to the value of the program counter to be used as the effective address. This allows the program to branch anywhere in the 64K memory map. Position independent code can be easily generated through the use of relative branching. Both short (8 bit) and long (16 bit) branches are available.

SYNC

After encountering a sync instruction, the MPU enters a sync state, stops processing instructions, and waits for an interrupt. If the pending interrupt is non-maskable (NMI) or maskable (FIRQ, IRQ) with its mask bit (F or I) clear, the processor will clear the sync state and perform the normal interrupt stacking and service routine. Since FIRQ and IRQ are not edge-triggered, a low level with a minimum duration of three bus cycles is required to assure that the interrupt will be taken. If the pending interrupt is maskable (FIRQ, IRQ) with its mask bit (F or I) set, the processor will clear the sync state and continue processing by executing the next in-line instruction. Figure 17 depicts sync timing.

SOFTWARE INTERRUPTS

A software interrupt is an instruction which will cause an interrupt and its associated vector fetch. These software interrupts are useful in operating system calls, software debugging, trace operations, memory mapping and software development systems. Three levels of SWI are available on the EF6809, and are prioritized in the following order: SWI, SWI2, SWI3.

16-BIT OPERATION

The EF6809 has the capability of processing 16-bit data. These instructions include loads, stores, compares, adds, subtracts, transfers, exchanges, pushes and pulls.

CYCLE-BY-CYCLE OPERATION

The address bus cycle-by-cycle performance chart (Figure 18) illustrates the memory access sequence corresponding to each possible instruction and addressing mode in the EF6809. Each instruction begins with an opcode fetch. While that opcode is being internally decoded, the next program byte is always fetched. Most instructions will use the next byte, so this technique considerably speeds through put. Next, the operation of each opcode will follow. The flowchart VMA is an acronym of FFFF16 on the address bus, R/W = 1 and BS = 2. The following examples illustrate the use of the chart.

Example 1: LBSR (Branch Taken)
Before Execution SP = F000

\$8000	LBSR	CAT		
SA000	CAT			

CYCLE-BY-CYCLE FLOW

Cycle #	Address	Data	R/W	Description
1	8000	17	1	Opcode Fetch
2	8001	20	1	Offset High Byte
3	8002	00	1	Offset Low Byte
4	FFFF	*	1	VMA Cycle
5	FFFF	*	1	VMA Cycle
6	A000	*	1	Computed Branch Address
7	FFFF	*	1	VMA Cycle
8	FFFF	80	0	Stack High Order Byte of Return Address
9	EFFE	03	0	Stack Low Order Byte of Return Address

Example 2: DEC (Extended)

\$8000	DEC	SA000
		*
		*
		*
SA000	SA00	

CYCLE-BY-CYCLE FLOW

Cycle #	Address	Data	R/W	Description
1	8000	7A	1	Opcode Fetch
2	8001	A0	1	Operand Address, High Byte
3	8002	00	1	Operand Address, Low Byte
4	FFFF	*	1	VMA Cycle
5	A000	80	1	Read the Data
6	FFFF	*	1	VMA Cycle
7	A000	7F	0	Store the Decrement Data

* The data bus has the data at that particular address.

INSTRUCTION SET TABLES

The instructions of the EF6809 have been broken down into five different categories. They are as follows:

8 bit operation (Table 4)

16-bit operation (Table 5)

Index register / stack pointer instructions (Table 6)

Relative branches (long or short) (Table 7)


Miscellaneous instructions (Table 8)

Hexadecimal values for the instructions are given in Table 9.

PROGRAMMING AID

Figure 19 contains a compilation of data that will assist in programming the EF6809.

FIGURE 17 - SYNC TIMING

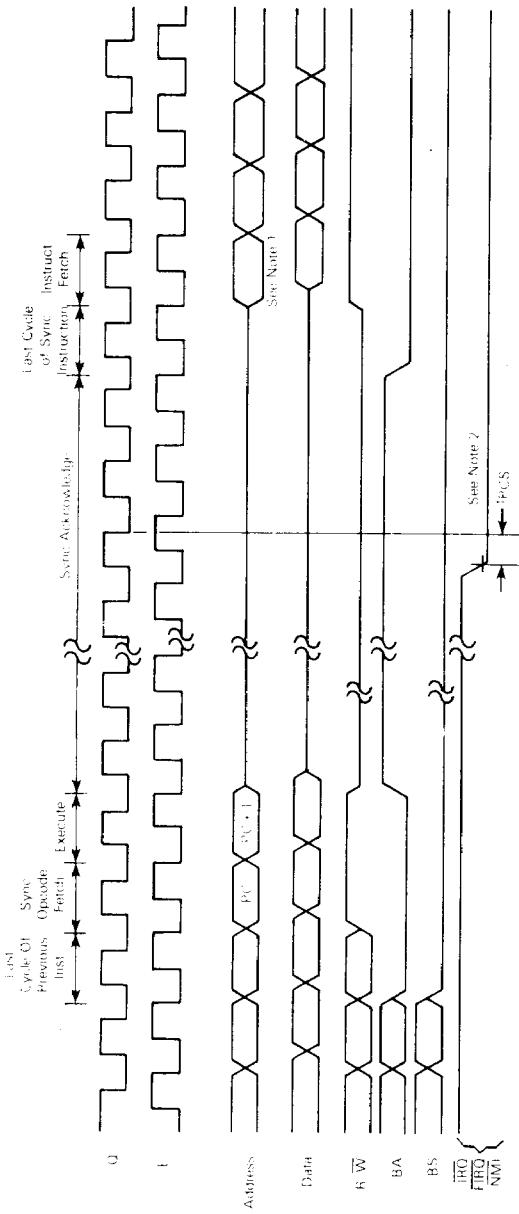


Note 1: See Note 1.
1. It is recommended to use a fast clock & good ground plane.
2. It is recommended to use a fast clock & good ground plane.
3. If the processor is connected to a slow external interface, it is recommended to use a fast clock & good ground plane.

Note 2: It is recommended to use a fast clock & good ground plane.
1. It is recommended to use a fast clock & good ground plane.
2. It is recommended to use a fast clock & good ground plane.

Note 3: It is recommended to use a fast clock & good ground plane.

FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 1 of 9)

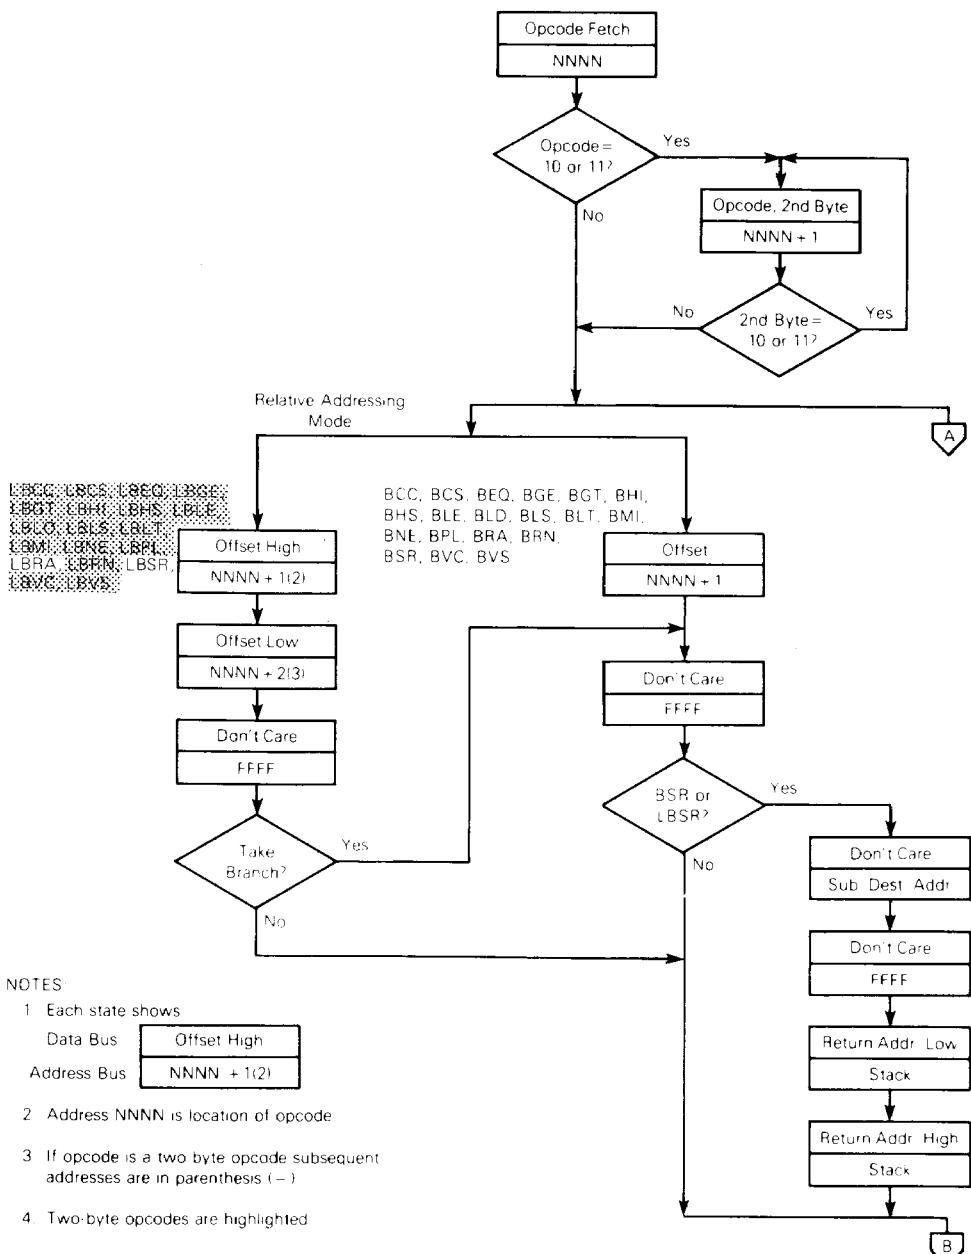

NOTES:

1. Each state shows

Data Bus	Offset High
Address Bus	NNNN + 1(2)
2. Address NNNN is location of opcode
3. If opcode is a two byte opcode subsequent addresses are in parenthesis (-)
4. Two-byte opcodes are highlighted

FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 2 of 9)

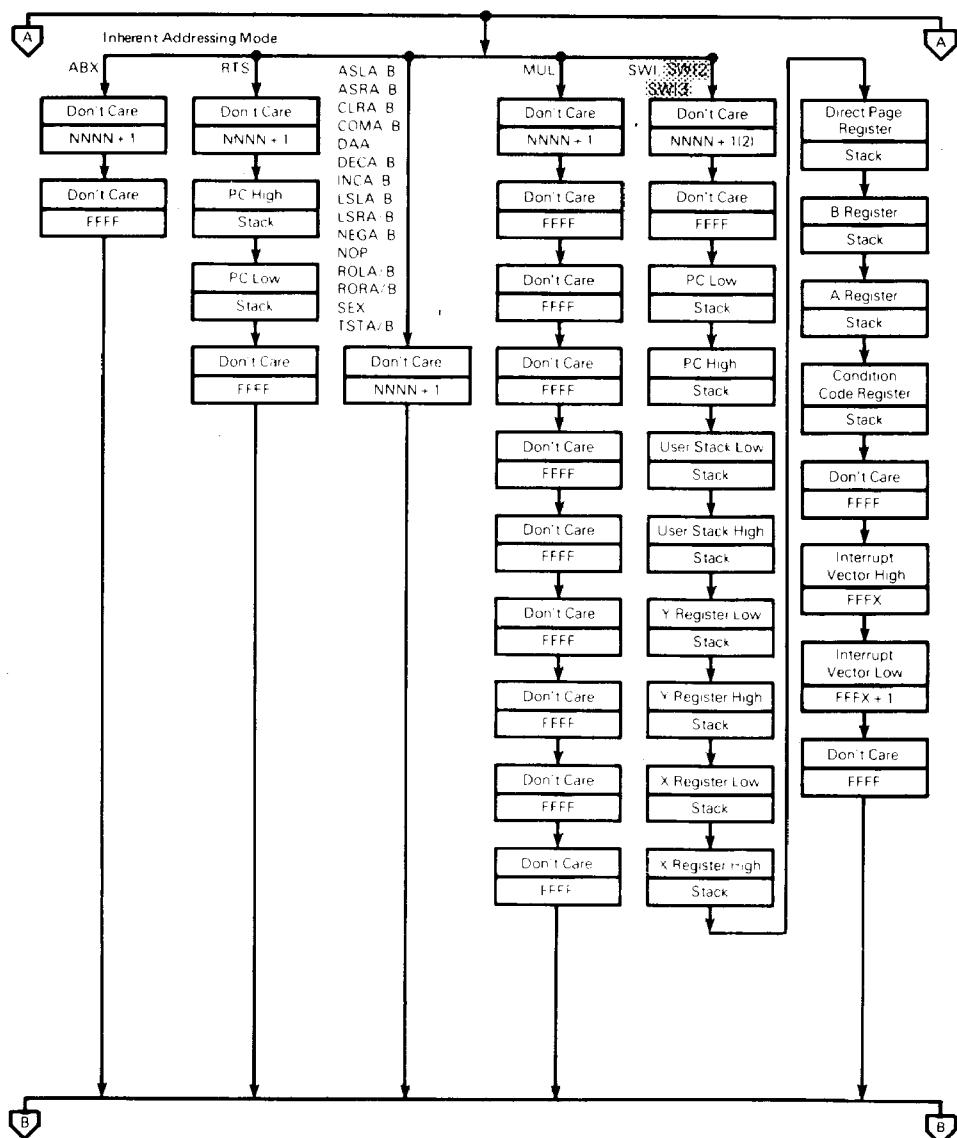


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 3 of 9)

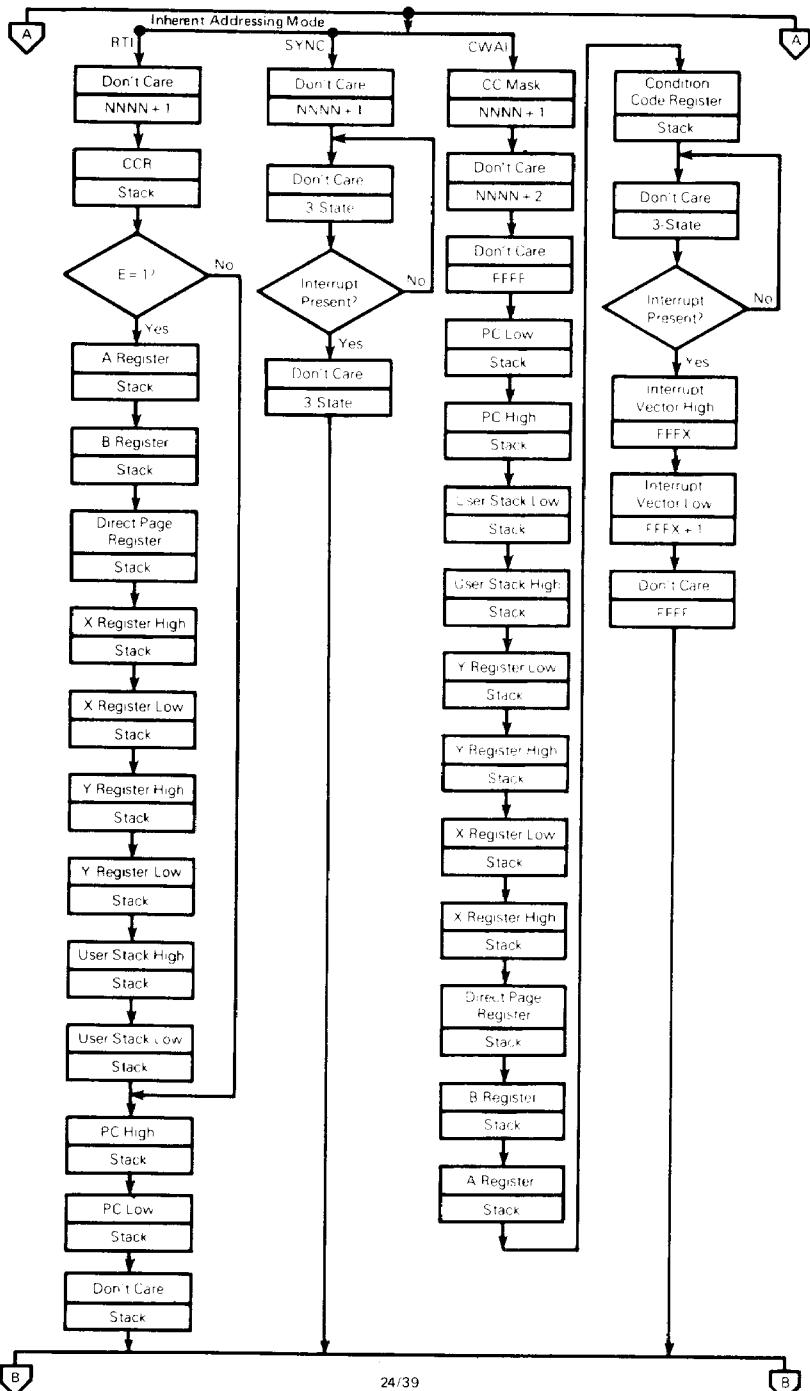


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 4 of 9)

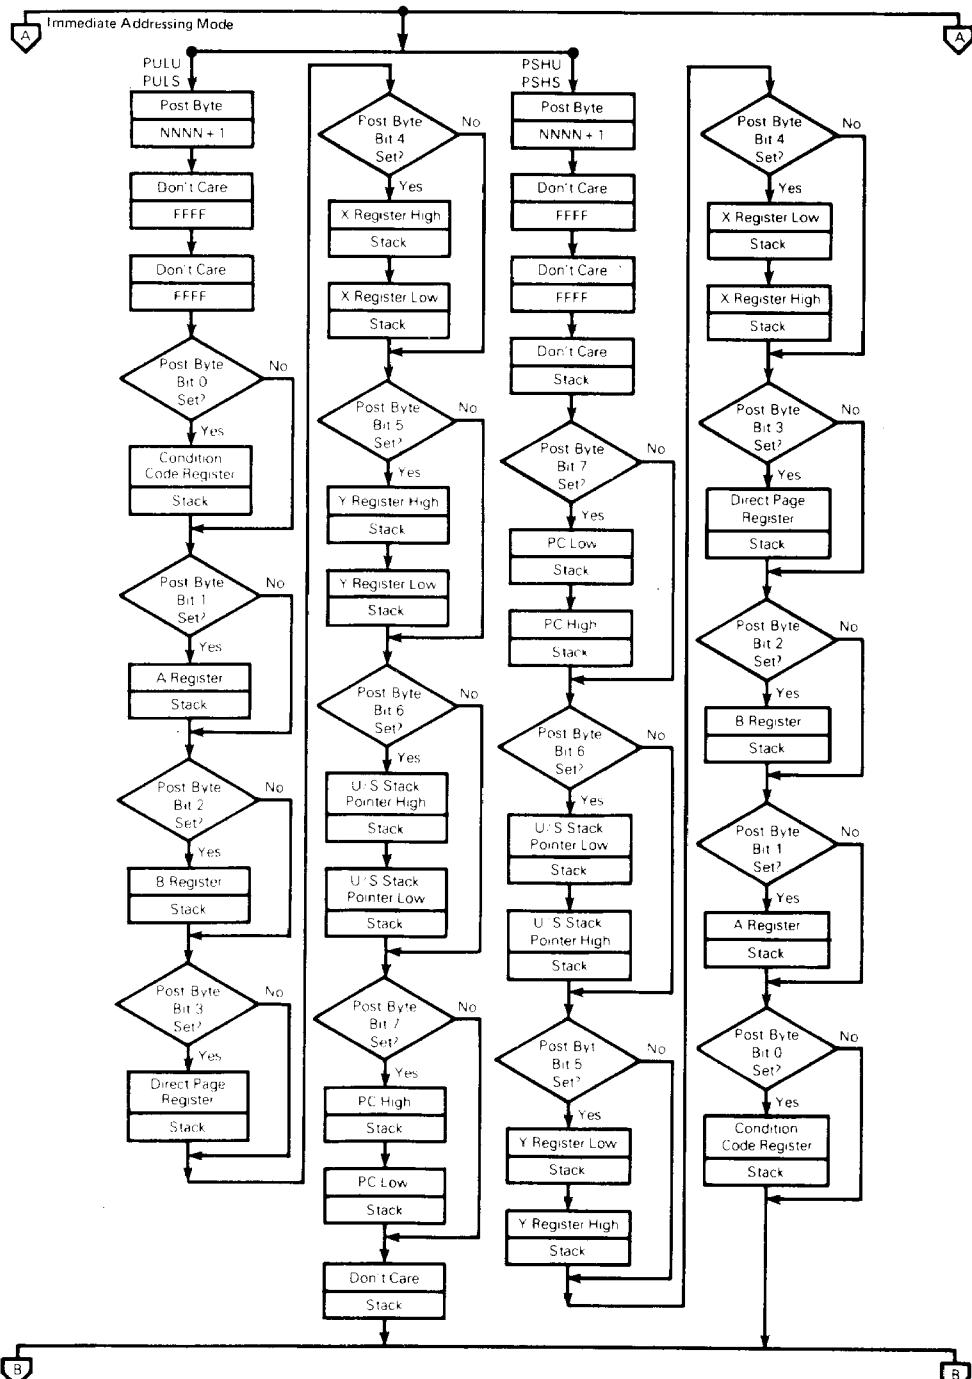


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 5 of 9)

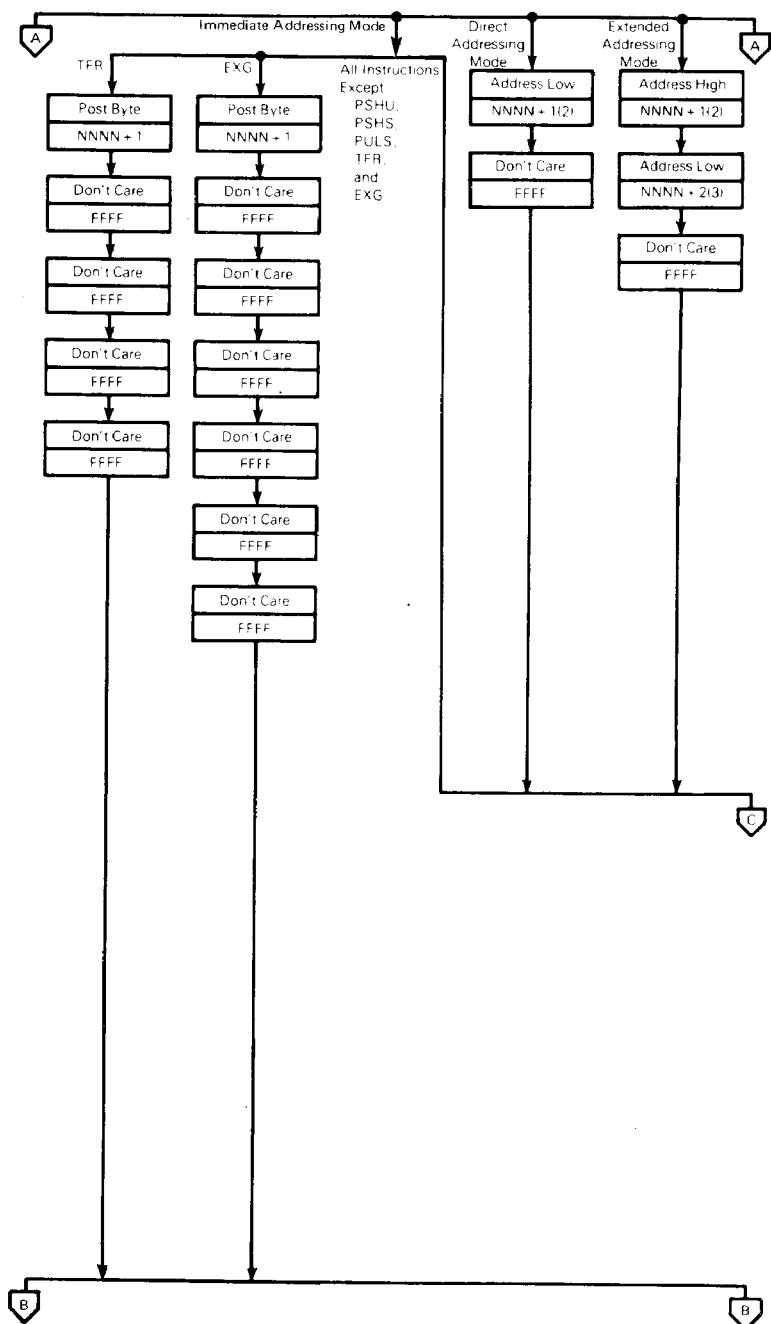


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 6 of 9)

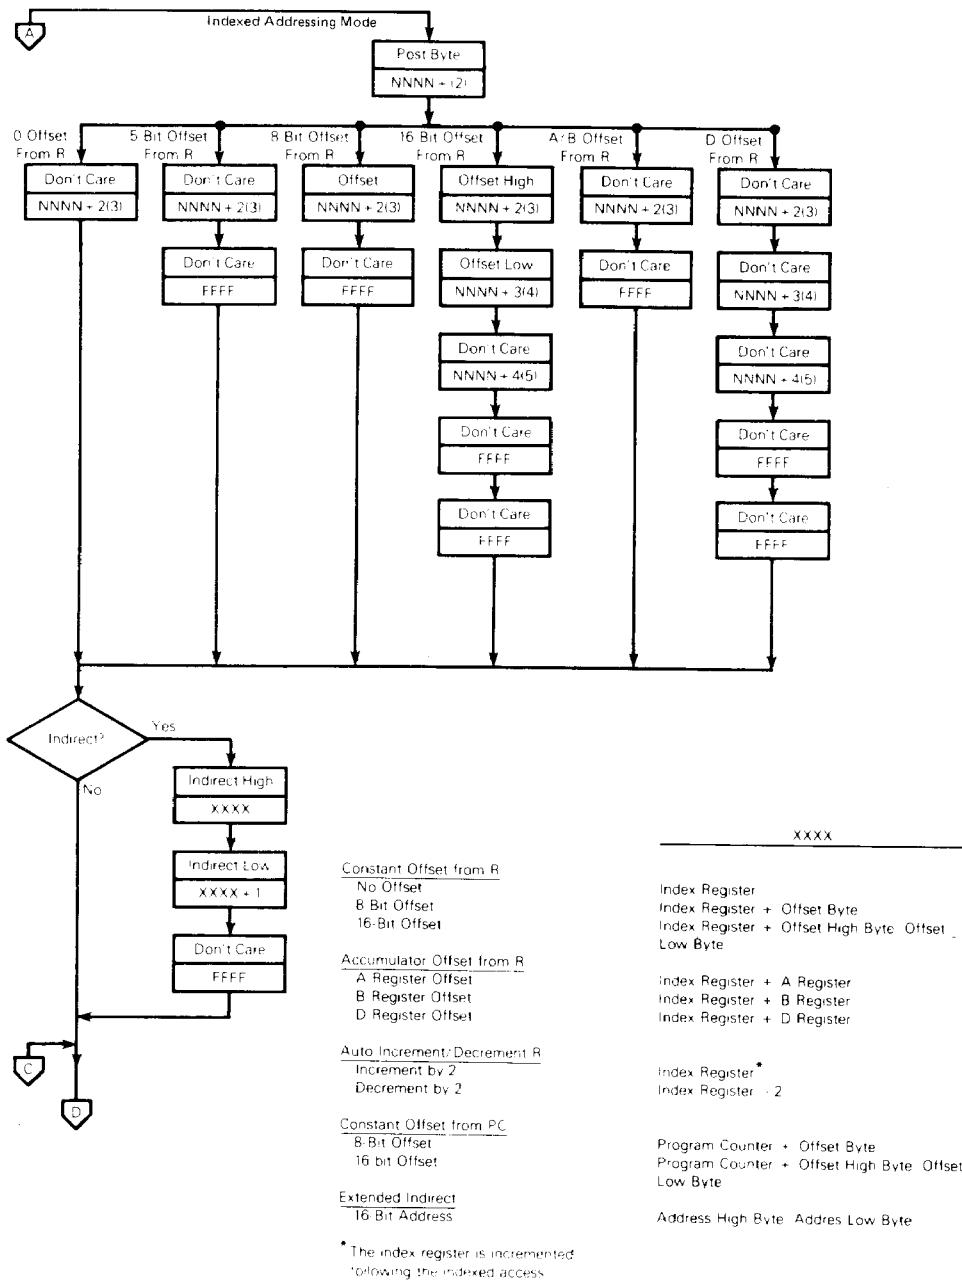


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 7 of 9)

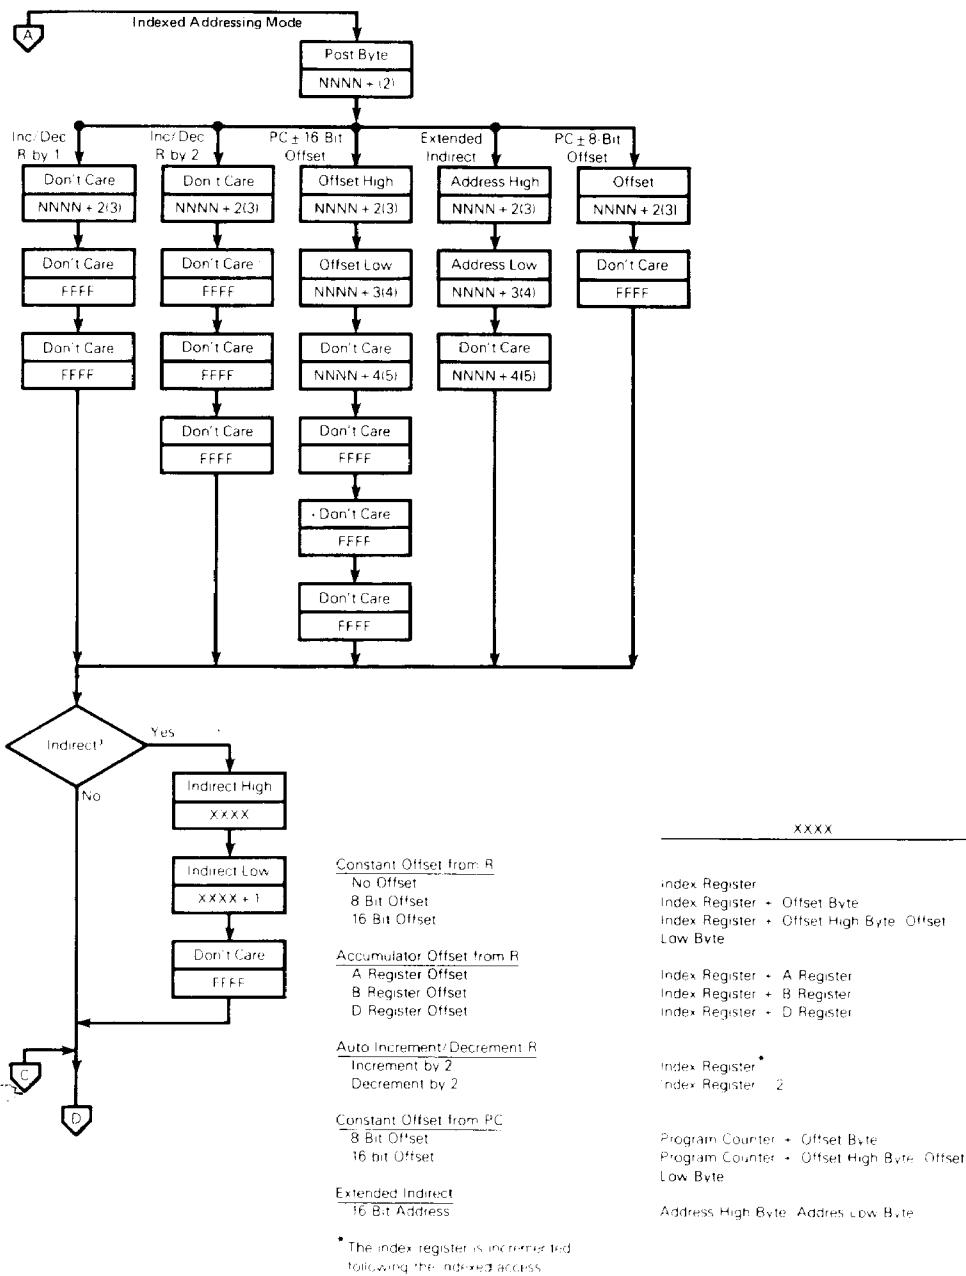
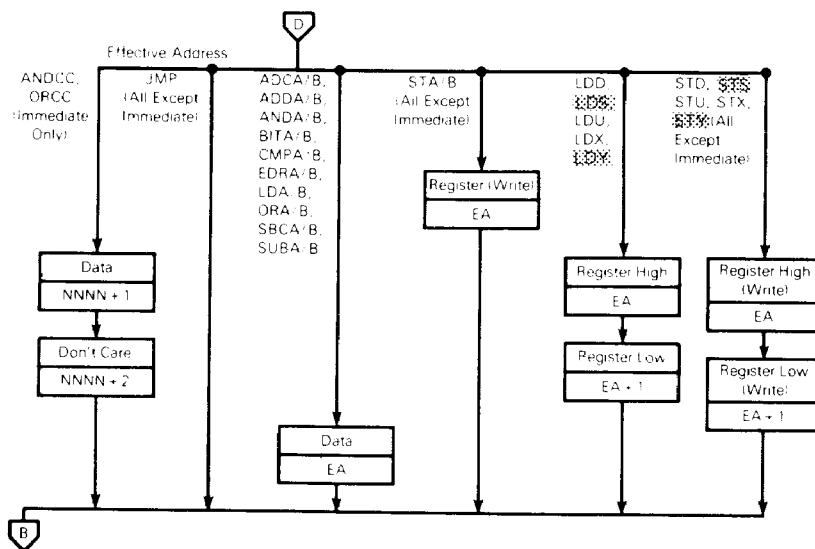


FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 8 of 9)

Constant Offset from R

- No Offset
- 5 Bit Offset
- 8 Bit Offset
- 16 Bit Offset

Effective Address (EA):

- Index Register
- Index Register
- Index Register + Post Byte
- Index Register + Post Byte High Post Byte Low

Accumulator Offset from R

- A Register Offset
- B Register Offset
- D Register Offset

- Index Register + A Register
- Index Register + B Register
- Index Register + D Register

Auto Increment, Decrement R

- Increment by 1
- Increment by 2
- Decrement by 1
- Decrement by 2

- Index Register + 1
- Index Register + 2
- Index Register - 1
- Index Register - 2

Constant Offset from PC

- 8 Bit Offset
- 16 Bit Offset

- Program Counter + Offset Byte
- Program Counter + Offset High Byte Offset Low Byte

Direct

- Direct Page Register Address Low

Extended


- Address High Address Low

Immediate

- NNNN + 1

* The index register is incremented following the indexed access.

FIGURE 18 – CYCLE-BY-CYCLE PERFORMANCE (Sheet 9 of 9)

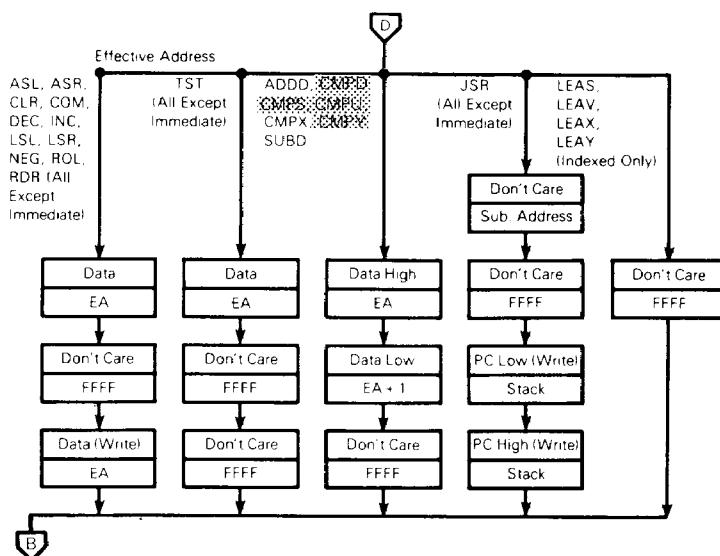

* The index register is incremented following the indexed access.

TABLE 4 - 8-BIT ACCUMULATOR AND MEMORY INSTRUCTIONS

Mnemonic(s)	Operation
ADCA, ADCB	Add memory to accumulator with carry
ADDA, ADDB	Add memory to accumulator
ANDA, ANDB	And memory with accumulator
ASL, ASLA, ASLB	Arithmetic shift of accumulator or memory left
ASR, ASRA, ASRB	Arithmetic shift of accumulator or memory right
BITA, BITB	Bit test memory with accumulator
CLR, CLRA, CLR _B	Clear accumulator or memory location
CMPA, CMPB	Compare memory from accumulator
COM, COMA, COMB	Complement accumulator or memory location
DAA	Decimal adjust A accumulator
DEC, DECA, DEC _B	Decrement accumulator or memory location
EORA, EORB	Exclusive or memory with accumulator
EXG R1, R2	Exchange R1 with R2 (R1, R2 = A, B, CC, DP)
INC, INCA, INC _B	Increment accumulator or memory location
LDA, LDB	Load accumulator from memory
LSL, LSLA, LSL _B	Logical shift left accumulator or memory location
LSR, LSRA, LSR _B	Logical shift right accumulator or memory location
MUL	Unsigned multiply (A × B → D)
NEG, NEGA, NEG _B	Negate accumulator or memory
ORA, ORB	Or memory with accumulator
ROL, ROLA, ROL _B	Rotate accumulator or memory left
ROR, RORA, ROR _B	Rotate accumulator or memory right
SBCA, SBCB	Subtract memory from accumulator with borrow
STA, STB	Store accumulator to memory
SUBA, SUBB	Subtract memory from accumulator
TST, TSTA, TSTB	Test accumulator or memory location
TFR R1, R2	Transfer R1 to R2, R1, R2 = A, B, CC, DP

NOTE: A, B, CC, or DP may be pushed to (pulled from) stack with either PSHS, PSHU (PULS, PULU) instructions.

TABLE 5 - 16-BIT ACCUMULATOR AND MEMORY INSTRUCTIONS

Mnemonic(s)	Operation
ADDD	Add memory to D accumulator
CMPD	Compare memory from D accumulator
EXG D, R	Exchange D with X, Y, S, U, or PC
LD _D	Load D accumulator from memory
SEX	Sign Extend B accumulator into A accumulator
STD	Store D accumulator to memory
SUBD	Subtract memory from D accumulator
TFR D, R	Transfer D to X, Y, S, U, or PC
TFR R, D	Transfer X, Y, S, U, or PC to D

NOTE: D may be pushed (pulled) to stack with either PSHS, PSHU (PULS, PULU) instructions.

TABLE 6 — INDEX REGISTER/STACK POINTER INSTRUCTIONS

Instruction	Description
CMPS, CMPU	Compare memory from stack pointer
CMPX, CMPY	Compare memory from index register
EXG R1, R2	Exchange D ₁ , X ₁ , S ₁ , or PC with D ₂ , X ₂ , S ₂ , or PC
LEAS, LEAU	Load effective address into stack pointer
LEAX, LEAY	Load effective address into index register
LDS, LDU	Load stack pointer from memory
LDX, LDY	Load index register from memory
PSHS	Push A, B, CC, DP, D, X, Y, U, or PC onto hardware stack
PSHU	Push A, B, CC, DP, D, X, Y, S, or PC onto user stack
PULS	Pull A, B, CC, DP, D, X, Y, U, or PC from hardware stack
PULL	Pull A, B, CC, DP, D, X, Y, S, or PC from user stack
STS, STU	Store stack pointer to memory
STX, STY	Store index register to memory
TFR R1, R2	Transfer D, X, Y, S, U, or PC to D ₂ , X ₂ , Y ₂ , S ₂ , U ₂ , or PC
ABX	Add B accumulator to X (unsigned)

TABLE 7 — BRANCH INSTRUCTIONS

Instruction	Description
SIMPLE BRANCHES	
BEQ, LBED	Branch if equal
BNE, LBNE	Branch if not equal
BMI, LBM	Branch if minus
BPI, LPPI	Branch if plus
BCS, LBGS	Branch if carry set
BCC, LBCC	Branch if carry clear
BVS, LBVS	Branch if overflow set
BVC, LBVC	Branch if overflow clear
SIGNED BRANCHES	
BGT, LBGT	Branch if greater (signed)
BVS, LBVS	Branch if valid vs complement result
BGE, LBGE	Branch if greater than or equal (signed)
BEQ, LBED	Branch if equal
BNE, LBNE	Branch if not equal
BLE, LBLE	Branch if less than or equal (signed)
BVC, LBVC	Branch if valid vs complement result
BLT, LBLT	Branch if less than (signed)
UNSIGNED BRANCHES	
BHI, LBHI	Branch if higher (unsigned)
BCC, LBCC	Branch if higher or same (unsigned)
BHS, LBHS	Branch if higher or same (unsigned)
BEC, LBEC	Branch if equal
BNE, LBNE	Branch if not equal
BLS, LBLS	Branch if lower or same (unsigned)
BCS, LBGS	Branch if lower (unsigned)
BLO, LBLO	Branch if lower (unsigned)
OTHER BRANCHES	
BSR, LBSR	Branch to subroutine
BRA, LBRA	Branch always
BRN, LBRN	Branch never

TABLE 8 — MISCELLANEOUS INSTRUCTIONS

Instruction	Description
ANDCC	AND condition code register
CWAI	AND condition code register, then wait for interrupt
NOP	No operation
ORCC	OR condition code register
JMP	Jump
JSR	Jump to subroutine
RTI	Return from interrupt
RTS	Return from subroutine
SWI, SWI2, SWI3	Software interrupt (absolute indirect)
SYNC	Synchronize with interrupt line

TABLE 9 -- HEXADECIMAL VALUES OF MACHINE CODES

OP	Mnem	Mode	-	#	OP	Mnem	Mode	-	#	OP	Mnem	Mode	-	#
00	NEG	Direct	6	2	30	LEAX	Indexed	4+	2+	60	NEG	Indexed	6+	2+
01	*				31	LEYA		4+	2+	61	*			
02	*				32	LEAS		4+	2+	62	*			
03	COM		6	2	33	LEAU	Indexed	4+	2+	63	COM		6+	2+
04	LSR		6	2	34	PSHS	Immed	5+	2	64	LSR		6+	2+
05	*				35	PULS	Immed	5+	2	65	*			
06	ROR		6	2	36	PSHU	Immed	5+	2	66	ROR		6+	2+
07	ASR		6	2	37	PULU	Immed	5+	2	67	ASR		6+	2+
08	ASL, LSL		6	2	38	*				68	ASL, LSL		6+	2+
09	ROL		6	2	39	RTS	Inherent	5	1	69	ROL		6+	2+
0A	DEC		6	2	3A	ABX		3	1	6A	DEC		6+	2+
0B	*				3B	RTI		6/15	1	6B	*			
0C	INC		6	2	3C	CWAI		≥20	2	6C	INC		6+	2+
0D	TST		6	2	3D	MUL	Inherent	11	1	6D	TST		6+	2+
0E	JMP		3	2	3E	*				6E	JMP		3+	2+
0F	CLR	Direct	6	2	3F	SWI	Inherent	19	1	6F	CLR	Indexed	6+	2+
10	Page 2		-	-	40	NEGA	Inherent	2	1	70	NEG	Extended	7	3
11	Page 3		-	-	41	*				71	*			
12	NOP	Inherent	2	1	42	*				72	*			
13	SYNC	Inherent	≥4	1	43	COMA		2	1	73	COM		7	3
14	*				44	LSRA		2	1	74	LSR		7	3
15	*				45	*				75	*			
16	LBRA	Relative	5	3	46	RORA		2	1	76	ROR		7	3
17	LBSR	Relative	9	3	47	ASRA		2	1	77	ASR		7	3
18	*				48	ASLA, LSIA		2	1	78	ASL, LSI		7	3
19	DAA	Inherent	2	1	49	ROLA		2	1	79	ROA		7	3
1A	ORCC	Immed	3	2	4A	DECA		2	1	7A	DEC		7	3
1B	*	-			4B	*				7B	*			
1C	ANDCC	Immed	3	2	4C	INCA		2	1	7C	INC		7	3
1D	SEX	Inherent	2	1	4D	TSTA		2	1	7D	TST		7	3
1E	EXG	Immed	8	2	4E	*				7E	JMF		4	3
1F	TFR	Immed	6	2	4F	CLRA	Inherent	2	1	7F	CLR	Extended	7	3
20	BRA	Relative	3	2	50	NEGB	Inherent	2	1	80	SUBA	Immed	2	2
21	BRN		3	2	51	*				81	CMPA		2	2
22	BHI		3	2	52	*				82	SBCA		2	2
23	BLS		3	2	53	COMB		2	1	83	SUBD		4	3
24	BHS, BCC		3	2	54	LSRB		2	1	84	ANDA		2	2
25	BLO, BCS		3	2	55	*				85	BITA		2	2
26	BNE		3	2	56	RORB		2	1	86	LDA		2	2
27	BEQ		3	2	57	ASRB		2	1	87	*			
28	BVC		3	2	58	ASLB, LSLB		2	1	88	EORA		2	2
29	BVS		3	2	59	ROLB		2	1	89	ADCA		2	2
2A	BPL		3	2	5A	DEC B		2	1	8A	ORA		2	2
2B	BMI		3	2	5B	*				8B	ADDA		2	2
2C	BGE		3	2	5C	INC B		2	1	8C	CMPX	Immed	4	3
2D	BLT		3	2	5D	TSTB		2	1	8D	BSR	Relative	7	2
2E	BGT		3	2	5E	*				8E	LDX	Immed	3	3
2F	BLE	Relative	3	2	5F	CLRB	Inherent	2	1	8F	*			

LEGEND

~ Number of MPU cycles (less possible push/pull or indexed mode cycles)

Number of program bytes

* Denotes unused opcode

TABLE 9 -- HEXADECIMAL VALUES OF MACHINE CODES (CONTINUED)

OP	Mnem	Mode	-	#	OP	Mnem	Mode	-	#	OP	Mnem	Mode	-	#
90	SUBA	0000	2	1	91	SUBB	0000	2	2	92	LBRN	Relative	5	4
91	CMPA	0000	4	1	92	CMPB	0000	4	2	93	LBH	Relative	5	4
94	SBCA	0000	3	1	93	SBCB	0000	3	2	94	LBIS	Relative	5	4
95	SEBD	0000	2	1	94	ACDD	0000	3	3	95	LBHS LBCL	Relative	5	4
94	ANDA	0000	4	1	95	ANDB	0000	2	2	96	LBLS LBCL	Relative	5	4
95	B1A	0000	4	1	96	B1B	0000	2	2	97	LBNE	Relative	5	4
96	LDA	0000	4	1	97	LDB	0000	2	2	98	LBEC	Relative	5	4
97	STA	0000	4	1	98	EXPR	0000	1	1	99	LBAL	Relative	5	4
98	LDRA	0000	4	1	99	ACDR	0000	2	2	9A	LBVR	Relative	5	4
9A	ORA	0000	4	1	9A	ORB	0000	2	2	9B	LBRL	Relative	5	4
9B	ADDA	0000	4	1	9B	ACOB	0000	2	2	9C	LBRS	Relative	5	4
9C	CMPX	0000	4	1	9C	LDN	0000	3	3	9D	LBVS	Relative	5	4
9D	LSR	0000	4	1	9D	LDU	0000	3	3	9E	LBFI	Relative	5	4
9E	LDX	0000	4	1	9E	STO	0000	1	1	9F	LBIM	Relative	5	4
9F	STX	0000	4	1	9F	STL	0000	1	1	9F	LBGE	Relative	5	4
										100	LBCL	Relative	5	4
A0	SUBA	0000	2	1	A0	SUBB	0000	2	2	A0	LBGT	Relative	5	4
A1	CMPA	0000	4	1	A1	CMPB	0000	4	2	A1	LBEP	Relative	5	4
A2	SBCA	0000	3	1	A2	SBCB	0000	3	2	A2	LBAL	Relative	5	4
A3	SEBD	0000	2	1	A3	ACDD	0000	3	3	A3	CMPL	Relative	5	4
A4	ANDA	0000	4	1	A4	ANDB	0000	2	2	A4	LBEP	Relative	5	4
A5	B1A	0000	4	1	A5	B1B	0000	2	2	A5	LBEP	Relative	5	4
A6	LDA	0000	4	1	A6	LDB	0000	2	2	A6	LBEP	Relative	5	4
A7	STA	0000	4	1	A7	STB	0000	2	2	A7	CMPL	Relative	5	4
A8	LDRA	0000	4	1	A8	DRB	0000	2	2	A8	LBEP	Relative	5	4
A9	ADCA	0000	4	1	A9	ACOB	0000	2	2	A9	LBEP	Relative	5	4
AA	ORA	0000	4	1	AA	JBB	0000	4	2	AA	CMPC	Relative	5	4
AB	ADDA	0000	4	1	AB	ACOB	0000	2	2	AB	CMPC	Relative	5	4
AC	CMPX	0000	4	1	AC	LDU	0000	3	3	AC	STAO	Relative	5	4
AD	LSR	0000	4	1	AD	STO	0000	1	1	AD	STAO	Relative	5	4
AE	LDX	0000	4	1	AE	LDI	0000	1	1	AE	LBEP	Relative	5	4
AF	STX	0000	4	1	AF	STL	0000	1	1	AF	LBEP	Relative	5	4
										101	CMPC	Relative	5	4
B0	SUBA	Exended	2	1	B0	SUBB	Exended	2	2	B0	LBEP	Relative	5	4
B1	CMPA	0000	4	1	B1	CMPB	0000	4	2	B1	LBEP	Relative	5	4
B2	SBCA	0000	3	1	B2	SBCB	0000	3	2	B2	LBEP	Relative	5	4
B3	SEBD	0000	2	1	B3	ACDD	0000	3	3	B3	LBEP	Relative	5	4
B4	ANDA	0000	4	1	B4	ANDB	0000	2	2	B4	LBEP	Relative	5	4
B5	B1A	0000	4	1	B5	B1B	0000	2	2	B5	LBEP	Relative	5	4
B6	LDA	0000	4	1	B6	LDB	0000	2	2	B6	LBEP	Relative	5	4
B7	STA	0000	4	1	B7	STB	0000	2	2	B7	LBEP	Relative	5	4
B8	LDRA	0000	4	1	B8	DRB	0000	2	2	B8	CMPL	Relative	5	4
B9	ADCA	0000	4	1	B9	ACOB	0000	2	2	B9	LBEP	Relative	5	4
BA	ORA	0000	4	1	BA	CPR	0000	2	2	BA	CMPC	Relative	5	4
BB	ADDA	0000	4	1	BB	ACOB	0000	2	2	BB	CMPS	Relative	5	4
BC	CMPX	0000	4	1	BC	LDD	0000	1	1	BC	CMPS	Relative	5	4
BD	LSR	0000	4	1	BD	STO	0000	1	1	BD	CMPS	Relative	5	4
BE	LDX	0000	4	1	BE	LDU	0000	3	3	BE	CMPS	Relative	5	4
BF	STX	0000	4	1	BF	STL	0000	1	1	BF	CMPS	Relative	5	4
										102	CMPS	Relative	5	4
NOTE: All unused opcodes are to be undefined and illegal.														

FIGURE 19 – PROGRAMMING AID

Instruction	Forms	Addressing Modes										Description	5 H	3 N	2 Z	1 V	0 C
		Immediate		Direct		Indexed		Extended		Inherent							
		Op	-	#	Op	-	#	Op	-	#	Op	-	#	Op	-	#	Op
ABX																	
ADC	ADCA	89	2	2	99	4	2	A9	4	24	B9	5	3				
	ADCB	C9	2	2	D9	4	2	E9	4	24	F9	5	3				
ADD	ADDA	8B	2	2	9B	4	2	AB	4	24	BB	5	3				
	ADDB	CB	2	2	DB	4	2	EB	4	24	FB	5	3				
	ADDD	C3	4	3	D3	6	2	EE	6	24	FE	5	3				
AND	ANDA	84	2	2	94	4	2	A4	4	24	B4	5	3				
	ANDB	C4	2	2	D4	4	2	FA	4	24	EA	5	3				
	ANDCC	1C	3	2													7
ASL	ASLA													48	2	1	
	ASLB													58	2	1	
	ASL																
ASR	ASRA													47	2	1	
	ASRB													57	2	1	
	ASR																
BIT	BITA	86	2	2	96	4	2	AB	4	24	B7	5	3				
	BITB	C6	2	2	D6	4	2	EB	4	24	FB	5	3				
CLR	CLRA													4F	2	1	
	CLRB													5F	2	1	
	CLRC																
CMPI	CMPIA	80	2	2	90	4	2	AB	4	24	B0	5	3				
	CMPIB	C1	2	2	D1	4	2	EB	4	24	FB	5	3				
	CMPID	C2	2	2	D2	4	2	EE	4	24	FE	5	3				
	CMPS	83	2	2	93	4	2	AB	4	24	B3	5	3				
	CMPS	C3	2	2	D3	4	2	EB	4	24	FB	5	3				
	CMPS	86	2	2	96	4	2	AB	4	24	B6	5	3				
	CMPS	C6	2	2	D6	4	2	EB	4	24	FB	5	3				
	CMPX	84	2	2	94	4	2	AB	4	24	B4	5	3				
	CMPY	C4	2	2	D4	4	2	EB	4	24	FB	5	3				
COM	COMA													47	2	1	
	COMB													57	2	1	
	COM																
UWAI		8C	220	2													2
DAA														19	2	1	
DEC	DECA																
	DECB																
	DEC																
FOR	FORA	88	2	2	98	4	2	AB	4	24	B8	5	3				
	FORB	C8	2	2	D8	4	2	EB	4	24	FB	5	3				
EXG	R1 R2	1F	9	2													
INC	INCA													4C	2	1	
	INCB													5C	2	1	
	INC																
JMP														3E	3	2	
JSR														9D	2	2	
LD	LDA	86	2	2	96	4	2	AB	4	24	B6	5	3				
	LDB	C6	2	2	D6	4	2	EB	4	24	FB	5	3				
	LDD	CC	3	3	DC	5	2	FC	5	24	FC	6	3				
	LDS	10	4	4	10	6	3	10	6	24	10	7	4				
	CE	CE															
	LDU	CE	3	3	DE	5	2	EE	5	24	EE	6	3				
	LDX	8E	3	3	9E	5	2	AB	5	24	BE	6	3				
	LDY	10	4	4	10	6	3	10	6	24	10	7	4				
	BF	BF															
LEA	LEAS													32	4	2	
	LEAU													33	4	2	
	LEAX													30	4	2	
	LEAY													31	4	2	

LEGEND

OP Operation Code (Hexadecimal)

~ Number of MPU Cycles

Number of Program Bytes

+ Arithmetic Plus

- Arithmetic Minus

• Multiply

M Complement of M

→ Transfer Into

H Half-carry (from bit 3)

N Negative (sign bit)

Z Zero result

V Overflow, 2's complement

C Carry from ALU

I Test and set if true, cleared otherwise

• Not Affected

CC Condition Code Register

: Concatenation

V Logical or

A Logical and

≠ Logical Exclusive or

FIGURE 19 — PROGRAMMING AID (CONTINUED)

Instruction	Forms	Addressing Modes										Description	5 H	3 N	2 Z	1 V	0 C						
		Immediate		Direct		Indexed ¹		Extended		Inherent													
		Op	#	Op	#	Op	#	Op	#	Op	#												
LSL	LSLA LSLB LSL											48											
LSR	LSRA LSRB LSR			08	6	2	68	+	2	68	2	49											
MUL												50											
NEG	NEGA NEG B NEG											40											
NOP												41											
OR	ORA ORB ORCC	82	2	2	82	4	2	AA	4	2	BB	5											
PSH	PSHS PSHL	34	1	4	2							51											
PUL	PULS PULL	35	1	4	2							52											
ROL	ROL A ROL B ROL											43											
ROR	RORA RORB ROR											44											
RTI												53											
RTS												54											
SBC	SBCA SBCB	82	2	2	92	4	2	AA	4	2	BB	5											
SEX												55											
ST	STA STB STD STS STC STU STX STY	47	4	2	47	4	2	47	4	2	47	5											
SUB	SUBA SUBB SUBD	80	2	2	90	4	2	47	4	2	BB	5											
SWI	SWI 6 SWI 7 SWI 8											56	19	1	SWI 6 interrupt								
												57	20	2	SWI 7 interrupt								
												58	21	2	SWI 8 interrupt								
SYNC												59	24	1	Sync ZEN interrupt								
TFR	R1, R2	1F	6	2								60	2	1	TR1 → R2								
TST	TSTA TSTB TST				00	6	2	60	6	2	70	7	3										
												4D	2	1	Test A								
												5D	2	1	Test B								
												5E	2	1	Test M								

NOTES

- This column gives a base cycle and byte count. To obtain total count, add the values obtained from the INDEXED ADDRESSING MODE table, Table 2.
- R1 and R2 may be any pair of 8 bit or any pair of 16 bit registers.
The 8 bit registers are A, B, CC, DP
The 16 bit registers are X, Y, U, S, D, PC
- EA is the effective address
- The PSH and PUL instructions require 5 cycles plus 1 cycle for each byte pushed or pulled
- 5(6) means 5 cycles if branch not taken, 6 cycles if taken (Branch instructions)
- SWI sets I and F bits. SWI2 and SWI3 do not affect I and F
- Conditions Codes set as a direct result of the instruction
- Value of half carry flag is undefined
- Special Case — Carry set if b7 is SET

FIGURE 19 — PROGRAMMING AID (CONTINUED)

Branch instructions

Instruction	Forms	Addressing Mode		Description	5 3 2 1 0				
		Relative	OP ~ 5 #		H	N	Z	V	C
BCC	BCC	24	3 1 2	Branch C=0	•	•	•	•	•
	LBCC	10	561 4	Long Branch C=0	•	•	•	•	•
BCS	BCS	26	3 1 2	Branch C<1	•	•	•	•	•
	LBSC	10	561 4	Long Branch C<1	•	•	•	•	•
BEQ	BEQ	27	3 1 2	Branch = Z<0	•	•	•	•	•
	LBEQ	10	561 4	Long Branch = Z<0	•	•	•	•	•
BGE	BGE	26	3 1 2	Branch ≥ Z<0	•	•	•	•	•
	LBGE	10	561 4	Long Branch ≥ Z<0	•	•	•	•	•
BGT	BGT	26	3 1 2	Branch > Z<0	•	•	•	•	•
	LBGT	10	561 4	Long Branch > Z<0	•	•	•	•	•
BHI	BHI	22	9 1 2	Branch < Height	•	•	•	•	•
	LBHI	10	561 4	Long Branch < Height	•	•	•	•	•
BHS	BHS	24	3 1 2	Branch > Height	•	•	•	•	•
	LBHS	10	561 4	Long Branch > Height	•	•	•	•	•
BIE	BIE	21	3 1 2	Branch <Zero	•	•	•	•	•
	LBIE	10	561 4	Long Branch <Zero	•	•	•	•	•
BIEV	BIEV	26	4	Branch < V	•	•	•	•	•
	LBIEV	10	561 4	Long Branch < V	•	•	•	•	•

Instruction	Forms	Addressing Mode		Description	5 3 2 1 0				
		Relative	OP ~ 5 #		H	N	Z	V	C
BLS	BLS	23	3 2	Branch Lower or Same	•	•	•	•	•
	LBLS	10	561 4	Long Branch Lower or Same	•	•	•	•	•
BLT	B LT	20	3 2	Branch < Zero	•	•	•	•	•
	LBLT	10	561 4	Long Branch < Zero	•	•	•	•	•
BM	BM	26	3 2	Branch Minus	•	•	•	•	•
	LBMI	10	561 4	Long Branch Minus	•	•	•	•	•
BNE	BNE	26	3 2	Branch ≠ Z<0	•	•	•	•	•
	LBNE	10	561 4	Long Branch ≠ Z<0	•	•	•	•	•
BPL	BPL	24	3 2	Branch + Plus	•	•	•	•	•
	LBPL	10	561 4	Long Branch + Plus	•	•	•	•	•
BRA	BRA	23	5	Branch Always	•	•	•	•	•
	BSA	10	5	Long Branch Always	•	•	•	•	•
BEN	BEN	23	5	Branch Never	•	•	•	•	•
	BSN	10	5	Long Branch Never	•	•	•	•	•
BSA	BSA	23	5	Branch to Subroutine	•	•	•	•	•
	BSAS	10	5	Long Branch to Subroutine	•	•	•	•	•
BSN	BSN	23	5	Branch to End	•	•	•	•	•
	BSNS	10	5	Long Branch to End	•	•	•	•	•
BVS	BVS	23	5	Branch v>1	•	•	•	•	•
	BSVS	10	5	Long Branch v>1	•	•	•	•	•

SIMPLE BRANCHES

	OP ~	#
BRA	20	3 2
LBRA	16	5 3
BRN	21	3 2
LBRN	1021	5 4
BSR	8D	7 2
LBSR	17	9 3

SIGNED CONDITIONAL BRANCHES (Notes 1-4)

Test	True	OP	False	OP
r > m	BGT	2E	BLE	2F
r ≥ m	BGE	2C	BLT	2D
r = m	BEQ	27	BNE	26
r ≤ m	BLE	2F	BGT	2E
r < m	BLT	2D	BGE	2C

SIMPLE CONDITIONAL BRANCHES (Notes 1-4)

Test	True	OP	False	OP
N = 1	BMI	2B	BPL	2A
Z = 1	BEQ	27	BNE	26
V = 1	BVS	29	BVC	28
C = 1	BCS	25	BCC	24


UNSIGNED CONDITIONAL BRANCHES (Notes 1-4)

Test	True	OP	False	OP
r > m	BHI	22	BLS	23
r ≥ m	BHS	24	BLO	25
r = m	BEQ	27	BNE	26
r ≤ m	BLS	23	BHI	22
r < m	BLO	25	BHS	24


NOTES:

- All conditional branches have both short and long variations
- All short branches are two bytes and require three cycles
- All conditional long branches are formed by prefixing the short branch opcode with \$10 and using a 16-bit destination offset
- All conditional long branches require four bytes and six cycles if the branch is taken or five cycles if the branch is not taken.

CASE

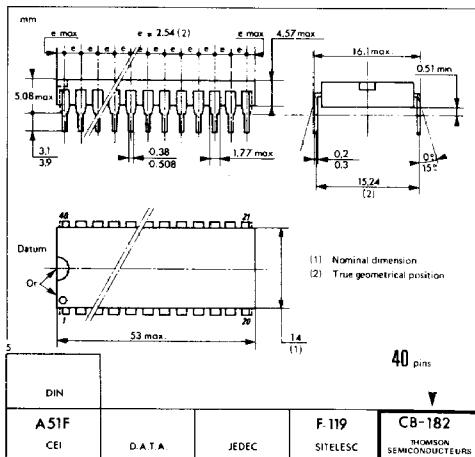

CB-182

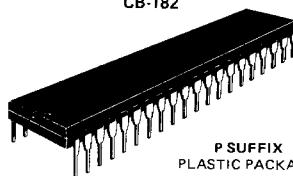P SUFFIX
PLASTIC PACKAGE

ALSO AVAILABLE

J SUFFIX
CERDIP PACKAGEC SUFFIX
CERAMIC PACKAGE


ORDERING INFORMATION

	EF68A09	C	M	B/B	Device	Screening level
					Package	Oper. temp.
The table below horizontally shows all available suffix combinations for package, operating temperature and screening level. Other possibilities on request.						
DEVICE	PACKAGE		OPER. TEMP		SCREENING LEVEL	
	C	J	P	E	FN	L* V M Std D G/B B/B
EF6809 (1.0 MHz)	●	●	●		●	●
	●	●	●			●
	●			●		●
		●				● ● ●
EF68A09 (1.5 MHz)	●	●	●		●	●
	●	●	●			●
	●			●		●
		●				● ● ●
EF68B09 (2.0 MHz)	●	●	●		●	●
	●	●	●			●


Examples : EF6809C, EF6809CV, EF6809CM

Package : C : Ceramic DIL, J : Cerdip DIL, P : Plastic DIL, E : LCCC, FN : PLCC.
 Oper. temp. : L* : 0°C to +70°C, V : -40°C to +85°C, M : -55°C to +125°C, * : may be omitted.
 Screening level : Std : (no-end suffix), D : NFC 96883 level D, G : NFC 96883 level G, B/B : NFC 96883 level B and MIL-STD-883C level B.



CASES

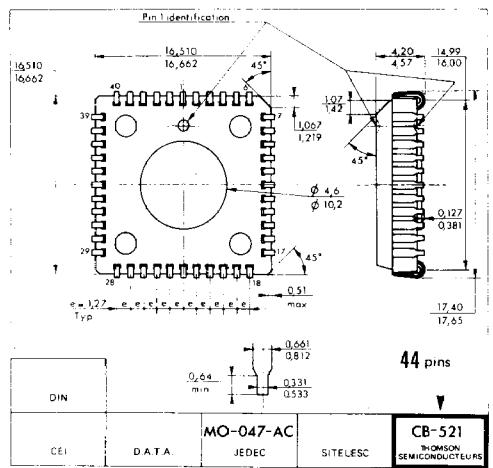

CB-521

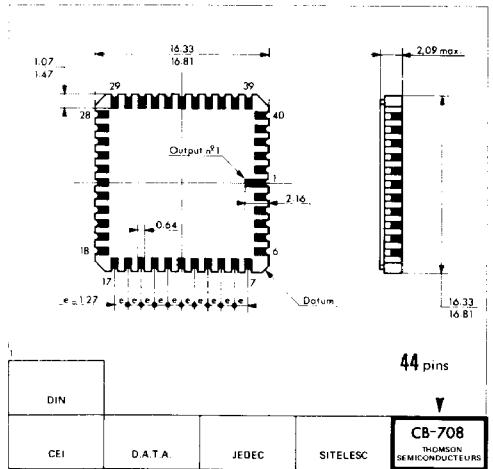FN SUFFIX
PLCC 44

CB-708

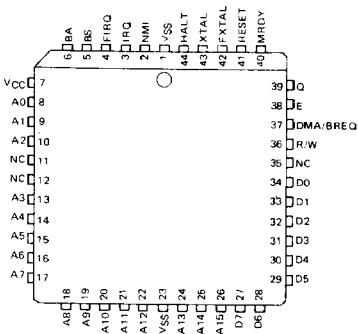E SUFFIX
LCCC 44

These specifications are subject to change without notice.
Please inquire with our sales offices about the availability of the different packages.

NOTES

This Page Intentionally Left Blank