

8K x 8 Bit EEPROM with Latches and Auto-Write

FEATURES

- Simple Byte Write
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - $\overline{\text{DATA}}$ Polling and Verification
- Enhanced Write Protection
- Single 5 volt Supply
- Byte Write: 10ms (max)—KM2864A
2ms (max)—KM2864AH
- Fast Access Time: 200ns
- Power: 50mA—Standby (max)
120mA—Operating (max)
- Two Line Control—Eliminates Bus Contention
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout


GENERAL DESCRIPTION

The KM2864A/AH is a 65,536 bit Electrically Erasable and Programmable Read-Only-Memory organized as 8,192 words by 8-bits. Its data can be modified using simple TTL level signals and a single 5 volt power supply.


Writing data into the KM2864A/AH is very simple. The internally self-timed write cycle latches both address and data to provide a free system bus during the write period which is 10ms (max) for the KM2864A or 2ms (max) for the KM2864AH.

The KM2864A/AH features $\overline{\text{DATA}}$ Polling, a software scheme to detect the early completion of a write cycle without requiring the use of any additional external hardware. The KM2864A/AH is fabricated with the well defined floating gate NMOS technology using Fowler-Nordheim tunneling for erasing and programming.

FUNCTIONAL BLOCK DIAGRAM

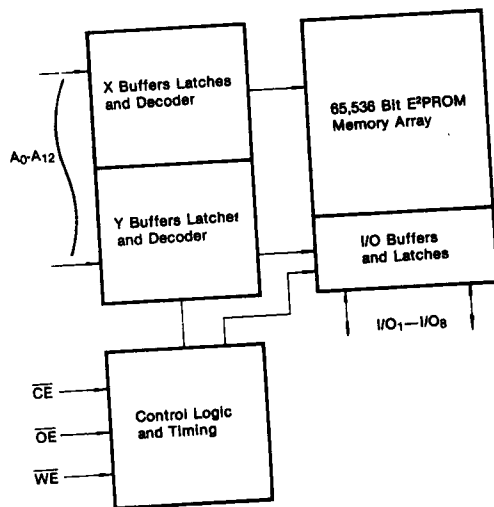

PIN CONFIGURATION

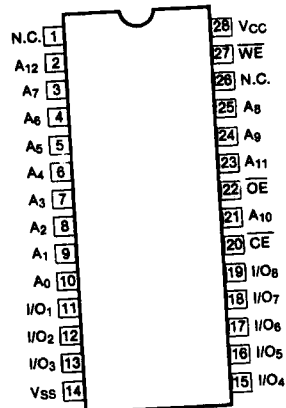

Pin Name	Pin Function
A ₀ -A ₁₂	Address Inputs
I/O ₁ -I/O ₈	Data Inputs/Outputs
$\overline{\text{CE}}$	Chip Enable
$\overline{\text{OE}}$	Output Enable
$\overline{\text{WE}}$	Write Enable
N.C.	No Connection
V _{CC}	Power (+ 5V)
V _{SS}	Ground

2.3 Static RAM

Capacity	Part Number	Organization	Speed (ns)	Technology	Current		Packages	Remark
					Active, mA Typ (max)	Standby, μ A Typ (max)		
16K bit	KM6816A-12	2K x 8	120	CMOS	20 (40)	10 (50)	24-Pin DIP	Now
	KM6816A-15	2K x 8	120	CMOS	20 (40)	10 (50)	24-Pin DIP	Now
	KM6816AL-12	2K x 8	150	CMOS	20 (40)	1 (10)	24-Pin DIP	Now
	KM6816AL-15	2K x 8	150	CMOS	20 (40)	1 (10)	24-Pin DIP	Now
64K bit	KM6284-12	8K x 8	120	CMOS	35 (45)	(1mA)	28-Pin DIP	Now
	KM6284-15	8K x 8	150	CMOS	35 (45)	(1mA)	28-Pin DIP	Now
	KM6284L-12	8K x 8	120	CMOS	35 (45)	2 (0.1mA)	28-Pin DIP	Now
	KM6284L-15	8K x 8	150	CMOS	35 (45)	2 (0.1mA)	28-Pin DIP	Now
256K bit	††KM62256P-10	32K x 8	100	CMOS	30 (45)	(1mA)	28-Pin DIP	TBA
	††KM62256P-12	32K x 8	120	CMOS	30 (45)	(1mA)	28-Pin DIP	TBA
	††KM62256P-15	32K x 8	150	CMOS	30 (45)	(1mA)	28-Pin DIP	TBA
	††KM62256LP-10	32K x 8	100	CMOS	30 (45)	(4 μ A)	28-Pin DIP	TBA
	††KM62256LP-12	32K x 8	120	CMOS	30 (45)	(4 μ A)	28-Pin DIP	TBA
	††KM62256LP-15	32K x 8	150	CMOS	30 (45)	(4 μ A)	28-Pin DIP	TBA

2.4 EEPROM

Capacity	Part Number	Organization	Speed (ns)	Technology	Write Cycle Time (max) (ms)	Features	Packages	Remark
16K bit	KM2816A-25	2K x 8	250	NMOS	10	—	24-Pin DIP	Now
	KM2816A-30	2K x 8	300	NMOS	10	—	24-Pin DIP	Now
	KM2816A-35	2K x 8	350	NMOS	10	—	24-Pin DIP	Now
	KM2817A-25	2K x 8	250	NMOS	10	Ready/Busy	28-Pin DIP	Now
	KM2817A-30	2K x 8	300	NMOS	10	Ready/Busy	28-Pin DIP	Now
	KM2817A-35	2K x 8	350	NMOS	10	Ready/Busy	28-Pin DIP	Now
64K bit	KM2864A-20	8K x 8	200	NMOS	10	Data Polling	28-Pin DIP	Now
	KM2864A-25	8K x 8	250	NMOS	10	Data Polling	28-Pin DIP	Now
	KM2864A-30	8K x 8	300	NMOS	10	Data Polling	28-Pin DIP	Now
	KM2865A-20	8K x 8	200	NMOS	10	Data Polling, Ready/Busy	28-Pin DIP	Now
	KM2865A-25	8K x 8	250	NMOS	10	Data Polling, Ready/Busy	28-Pin DIP	Now
	KM2865A-30	8K x 8	300	NMOS	10	Data Polling, Ready/Busy	28-Pin DIP	Now
	†KM2864AH-20	8K x 8	200	NMOS	2	Data Polling	28-Pin DIP	Now
	†KM2864AH-25	8K x 8	250	NMOS	2	Data Polling	28-Pin DIP	Now
	†KM2864AH-30	8K x 8	300	NMOS	2	Data Polling	28-Pin DIP	Now
	†KM2865AH-20	8K x 8	200	NMOS	2	Data Polling, Ready/Busy	28-Pin DIP	Now
	†KM2865AH-25	8K x 8	250	NMOS	2	Data Polling, Ready/Busy	28-Pin DIP	Now
	†KM2865AH-30	8K x 8	300	NMOS	2	Data Polling, Ready/Busy	28-Pin DIP	Now
	††KM28C64-15	8K x 8	150	CMOS	10	Data Polling, Page Mode	28-Pin DIP	TBA
	††KM28C64-20	8K x 8	200	CMOS	10	Data Polling, Page Mode	28-Pin DIP	TBA
††KM28C64-25	8K x 8	250	CMOS	10	Data Polling, Page Mode	28-Pin DIP	TBA	

† New Product

†† Under Development


TBA: To Be Announced

8K x 8 Bit EEPROM with Latches and Auto-Write

FEATURES

- Simple Byte Write
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - $\overline{\text{DATA}}$ Polling and Verification
 - Ready/Busy Output Pin (KM2865A)
- Enhanced Write Protection
- Single 5 volt Supply
- Byte Write: 10ms (max)
- Fast Access Time: 200ns
- Power: 50mA—Standby (max)
120mA—Operating (max)
- Two Line Control—Eliminates Bus Contention
- NMOS Floating Gate Technology
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout

FUNCTIONAL BLOCK DIAGRAM

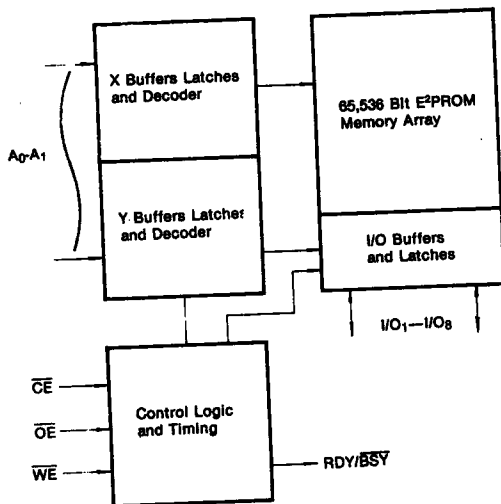


GENERAL DESCRIPTION

The KM2864A/65A is a 65,536 bit Electrically Erasable and Programmable Read-Only-Memory organized as 8,192 words by 8-bits. Its data can be modified using simple TTL level signals and a single 5 volt power supply.

Writing data into the KM2864A/65A is very simple. The internally self-timed write cycle latches both address and data to provide a free system bus during the 10ms (max) write period.

The KM2864A features $\overline{\text{DATA}}$ Polling, which enables the E2PROM to signal the processor that a write operation is complete without requiring the use of any external hardware. The KM2865A is identical to the KM2864A and in addition has a Ready/Busy output on pin 1 which signals when the write operation is complete.

PIN CONFIGURATION

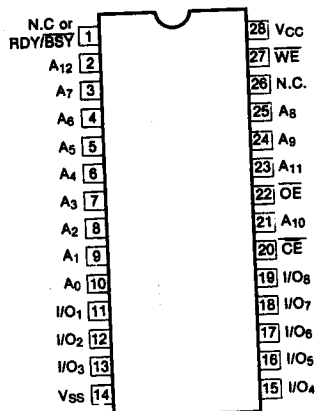


Pin Name	Pin Function
A ₀ -A ₁₂	Address Inputs
I/O ₁ -I/O ₈	Data Inputs/Outputs
$\overline{\text{CE}}$	Chip Enable
$\overline{\text{OE}}$	Output Enable
$\overline{\text{WE}}$	Write Enable
RDY/BSY	Ready/Busy Output
N.C.	No Connect
V _{cc}	Power (+ 5V)
V _{ss}	Ground

8K x 8 Bit High Performance EEPROM with Latches and Auto-Write

FEATURES

- Simple Byte Write
 - Fast Byte Write Time
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - DATA Polling and Verification
 - Ready/Busy Output Pin (KM2865AH)
- Enhanced Write Protection
- Single 5 volt Supply
- Byte Write: 2ms (max)
- Fast Access Time: 200ns
- Power: 50mA—Standby (max)
120mA—Operating (max)
- Two Line Control—Eliminates Bus Contention
- NMOS Floating Gate Technology
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout

FUNCTIONAL BLOCK DIAGRAM

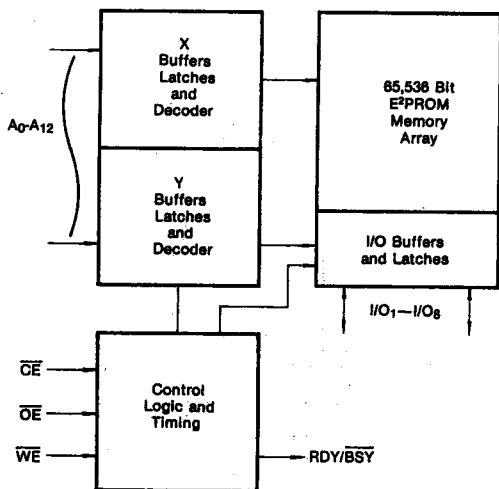


GENERAL DESCRIPTION

The KM2864AH/65AH is a 65,536 bit Electrically Erasable and Programmable Read-Only-Memory organized as 8,192 words by 8-bits. Its data can be modified using simple TTL level signals and a single 5 volt power supply.

Writing data into the KM2864AH/65AH is very simple. The internally self-timed write cycle latches both address and data to provide a free system bus during the 2ms (max) write period.

The KM2864AH features DATA Polling, which enables the E²PROM to signal the processor that a write operation is complete without requiring the use of any external hardware. The KM2865AH is identical to the KM2864AH and in addition has a Ready/Busy output on pin 1 which signals when the write operation is complete. For systems requiring faster byte write time the KM2864AH/65AH is specified at 2ms.

PIN CONFIGURATION

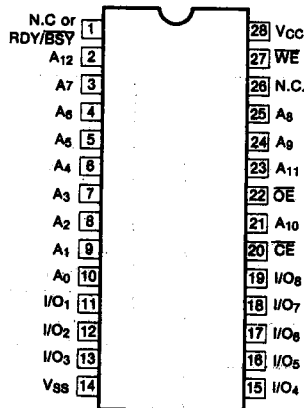


Pin Name	Pin Function
A ₀ -A ₁₂	Address Inputs
I/O ₁ -I/O ₈	Data Inputs/Outputs
CE	Chip Enable
OE	Output Enable
WE	Write Enable
RDY/BSY	Ready/Busy Output
N.C.	No Connect
V _{CC}	Power (+ 5V)
V _{SS}	Ground

8K × 8 CMOS Electrically Erasable PROM

FEATURES

- Simple Byte Write
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - DATA Polling and Verification
 - Ready/Busy Output Pin (KM28C65)
- 32-byte page write: 5mS max
 - Effective 150μS/byte write
- Enhanced Write Protection
- Single 5 volt Supply
- Fast Access Time: 150nS
- Power: 100 μA — Standby (max)
30 mA — Operating (max)
- Two Line Control-Eliminates Bus Contention
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout

FUNCTIONAL BLOCK DIAGRAM

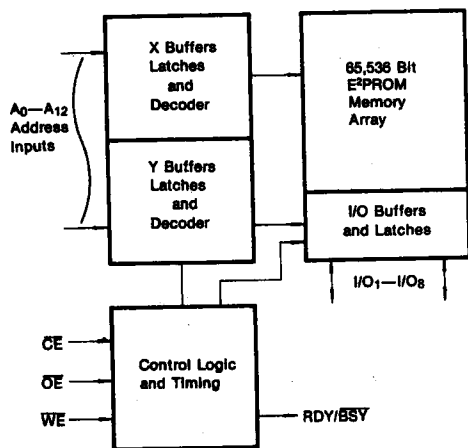

GENERAL DESCRIPTION

The KM28C64/C65 is a 8,192 × 8 bit electrically erasable and programmable Read Only Memory. Its data can be modified using simple TTL level signals and a single 5 volt power supply.

Writing data into the KM28C64/C65 is very simple. The internally self-timed write cycle latches both address bus during the 5mS (max) write period.

A 32-byte page write enables an entire chip written in 1.3 second.

The KM28C64/C65 features DATA-polling, which enables the EEPROM to signal the processor that a write operation is complete without requiring the use of any external hardware. Ready/Busy is a hardware scheme in which Pin 1 is used to signal the status of the write operation and is especially useful in interrupt driven systems.

The KM28C64/C65 is fabricated with the well defined floating gate CMOS technology using Fowler-Nordheim tunneling for erasing and programming.

PIN CONFIGURATION



Pin Name	Pin Function
A ₀ —A ₁₂	Address Inputs
I/O ₁ —I/O ₈	Data Inputs/Outputs
\overline{CE}	Chip Enable
\overline{OE}	Output Enable
\overline{WE}	Write Enable
RDY/BSY	Ready/Busy Output
N.C.	No Connect
V _{CC}	+ 5V
V _{SS}	Ground

8K x 8 CMOS Electrically Erasable PROM

FEATURES

- Simple Byte Write
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - DATA Polling and Verification
 - Ready/Busy Output Pin (KM28C65)
- 32-byte page write: 5ms max
 - Effective 150µS/byte write
- Enhanced Write Protection
- Single 5 volt Supply
- Fast Access Time: 150ns
- Power: 100 µA — Standby (max)
30 mA — Operating (max)
- Two Line Control—Eliminates Bus Contention
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout

GENERAL DESCRIPTION

The KM28C64/C65 is a 8,192 x 8 bit electrically erasable and programmable Read Only Memory. Its data can be modified using simple TTL level signals and a single 5 volt power supply.


Writing data into the KM28C64/C65 is very simple. The internally self-timed write cycle latches both address bus during the 5mS (max) write period.

A 32-byte page write enables an entire chip written in 1.3 second.


The KM28C64/C65 features DATA-polling, which enables the EEPROM to signal the processor that a write operation is complete without requiring the use of any external hardware. Ready/Busy is a hardware scheme in which Pin 1 is used to signal the status of the write operation and is especially useful in interrupt driven systems.

The KM28C64/C65 is fabricated with the well defined floating gate CMOS technology using Fowler-Nordheim tunneling for erasing and programming.

FUNCTIONAL BLOCK DIAGRAM

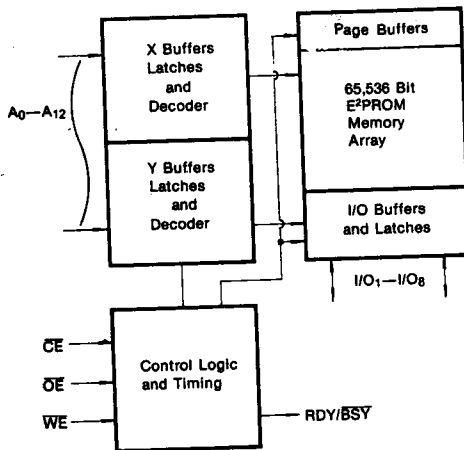

PIN CONFIGURATION

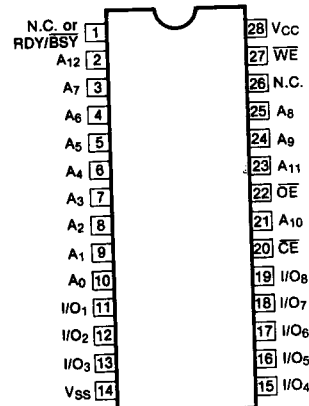

Pin Name	Pin Function
A ₀ —A ₁₂	Address Inputs
I/O ₁ —I/O ₈	Data Inputs/Outputs
\overline{CE}	Chip Enable
\overline{OE}	Output Enable
\overline{WE}	Write Enable
RDY/BSY	Ready/Busy Output
N.C.	No Connect
V _{cc}	+ 5V
V _{ss}	Ground

8K x 8 Bit EEPROM with Latches and Auto-Write

FEATURES

- Simple Byte Write
 - Fast Byte Write Time
 - Single TTL Level Write Signal
 - Latched Address and Data
 - Automatic Internal Erase-before-Write
 - Automatic Write Timing
 - DATA Polling and Verification
 - Ready/Busy Output Pin
- Enhanced Write Protection
- Single 5 volt Supply
- Byte Write: 10ms (max)—KM2865A
2ms (max)—KM2865AH
- Fast Access Time: 200ns
- Power: 50mA—Standby (max)
120mA—Operating (max)
- Two Line Control—Eliminates Bus Contention
- 10,000 Cycle Endurance
- JEDEC Byte-wide Memory Pinout

GENERAL DESCRIPTION


The KM2865A/AH is a 65,536 bit Electrically Erasable and Programmable Read-Only-Memory organized as 8,192 words by 8-bits. Its data can be modified using simple TTL level signals and a single 5 volt power supply.

Writing data into the KM2865A/AH is very simple. The internally self-timed write cycle latches both address and data to provide a free system bus during the write period which is 10ms (max) for the KM2865A or 2ms (max) for the KM2865AH.


The KM2865A/AH features two end of write detection schemes to provide maximum design flexibility while enhancing the system performance. DATA Polling is a software scheme to detect the early completion of a write cycle without using any additional hardware. Ready/Busy is a hardware scheme in which Pin 1 is used to signal the status of the write operation and is especially useful in interrupt driven systems.

The KM2865A/AH is fabricated with the well defined floating gate NMOS technology using Fowler-Nordheim tunneling for erasing and programming.

FUNCTIONAL BLOCK DIAGRAM

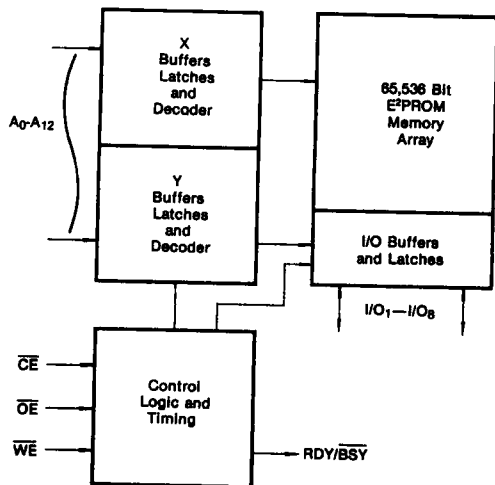

PIN CONFIGURATION

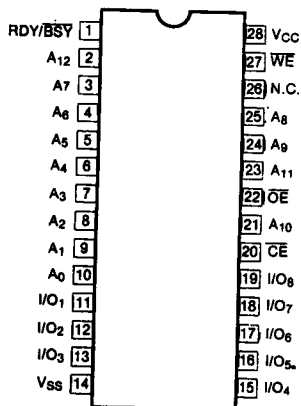

Pin Name	Pin Function
A ₀ -A ₁₂	Address Inputs
I/O ₁ -I/O ₈	Data Inputs/Outputs
CE	Chip Enable
OE	Output Enable
WE	Write Enable
RDY/BSY	Ready/Busy Output
N.C.	No Connection
V _{cc}	Power (+ 5V)
V _{ss}	Ground