


# 7-pin, shuttle dot TM-U295

**EPSON®**

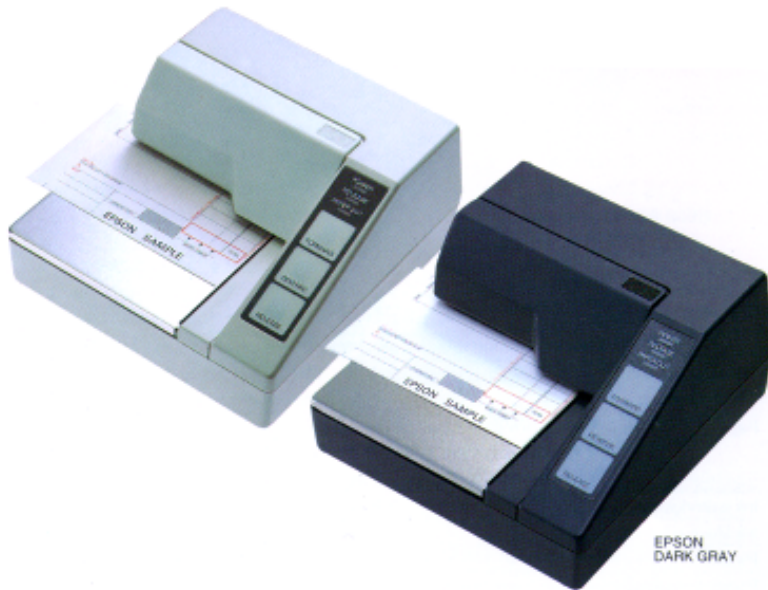

## Ultra-Compact Slip Printer

### Smallest Slip Printer In The World

Provides Printing versatility from an ultra-compact POS unit.

### Outstanding Versatility

Complete with a selection of character sizes. Also capable of printing in four directions.

<b>Print method</b>		7-pin, shuttle impact dot matrix
<b>Print font</b>	Font	5x7 / 7x7
	Column capacity (columns)	35/42
	Character size (mm)	1. 6(W) x 2.9(H)/1.3(W) x 2.9(H)
	Character set	95 Alphanumeric, 32 International, 128x3 Graphic
	Character Per Inch	13.5 CPI/ 16.2 CPI
<b>Interfaces</b>		RS-232/Bi-directional parallel
<b>Data buffer</b>		512 bytes or 35 bytes
<b>Print speed</b>		2.1 LPS
<b>Paper</b>	Dimensions (mm)	80(W) x 69(L) to 182(W) x 257(L)
	Thickness (mm)	0.09 to 0.25 (total thickness with copy: ~0.35)
<b>Copy capability</b>		One original and two copies
<b>Inked ribbon</b>		ERC-27 (purple)
<b>Ribbon life</b>		15 x 10 <sup>5</sup> characters
<b>Power</b>		24VDC ± 10%
<b>Power consumption</b>		Approx. 600mA (mean)
<b>D.K.D. function</b>		2 drivers
<b>Reliability</b>	MTBF: 18 x 10 <sup>4</sup> hours	
	MCBF: 7 x 10 <sup>6</sup> lines	
<b>Overall dimensions (mm)</b>		180(W) x 190.5(D) x 101.5(H)
<b>Weight (Approx.)</b>		1.6Kg
<b>EMC standards</b>		VCCI class A, FCC class A, CE marking, AS / NZS 3548 class B
<b>Power supply</b>		PS-170 (option)
<b>Safety standards</b>		UL/CSA/TÜV (EN60950)