TICKET 35



AS THE TICKET OUTLET.

BANKNOTE AND TOKEN ACCEPTOR UNITS CAN BE CONNECTED TO THE TG35 SO THAT

GAME DATA CAN BE STORED AND PRINTED OUT ON REQUEST.

FIG. 1 FIG. 2





- MECHANICALLY AND ELECTRONICALLY COMPATIBLE
 WITH THE TICKET OUTLET
- HIGH SPEED PRINTING AT 42 MM/SEC. (60 MM/SEC. FOR PAPER FEED)
- WIDE VOLTAGE RANGE FROM 9 TO 13 VDC
- DATE/TIME CLOCK WITH BUFFER BATTERY STANDARD
- ELECTRONIC ANTI-PAPER JAM SYSTEM
- CUSTOMIZED TICKET CAN BE MODIFIED USING A SIMPLE SETTING PROCEDURE
- MANUAL PAPER TEAR-OFF
- INDIVIDUAL TICKET FOR EACH WIN
- INDIVIDUAL TICKET FOR MULTIPLE WINS
- PARTIAL POINT TICKET
- RETAINS AND GUARANTEES THE WIN EVEN IN CASE OF ELECTRICAL BLACKOUT
- SEQUENTIAL NUMBERING OF ISSUED TICKETS
- CUSTOMIZABLE WITH B&W OR COLOR PRINTING ON THE REVERSE SIDE OF THE ROLL
- TWO-COLOR HEAT PRINTING WITH SPECIAL PAPER
- Possibility of utilizing thermal paper with invisible anti-forgery mark
- DAILY AND SEQUENTIAL NUMBERING
- Date and time printed on last anti-forgery zero reset
- PIEZO DISCHARGE-PROOF
- ANTI-JAM AND ANTI-VANDALISM SYSTEMS
- TICKET PRINTED REVERSE SIDE UP AS PRIVACY PROTECTION
- ANTI-FORGERY PAPER
- PARAMETERS SET USING PRINTER KEYS OR
 PC PROGRAM SUPPLIED ON REQUEST, COMPLETE WITH CONNECTOR CABLE
- TICKET WIDTH 35 MM TO MATCH TICKET OUTLET, OR 58 MM (TG58)
- RS232 OR TTL SERIAL INTERFACES
- EASY-ACCESS PAPER HOLDER



HEAD OFFICE:

CUSTOM ENGINEERING S.R.L.
VIA BERETTINE, 2 • 43010 FONTEVIVO PARMA (ITALY)
TEL. +39-0521-680111 (10 LINEE R.A.)
FAX +39-0521-610701
WWW.CUSTOM.IT • E-MAIL: INFO@CUSTOM.IT

FIG. 3

REPORT

Ora-Data = 13:36 84-10-99 Vincite = nº 1 Biglietti erogati = nº 1 Coin in = 0

Note in : 0

Ultimo azzeramento:09:52 04-10-99

Nº serie = 000000

[FEED] o [REPORT] per USCIRE [FEED]+[REPORT] per AZZERARE

FIG. 1 MODEL WITHOUT FRONT PANEL

FIG. 2 OPTIONS

FIG. 3 SAMPLE REPORT

FIG. 4 SAMPLE TICKET, SCALE 1:1

FIG. 5 MACHINE DIMENSIONS

FIG. 4



HAI VINTO




BUONO Consumazione

CUSTOM

via BERETTINE Fontevivo tel. 0521 680111 16:31 22-89-99 4

FIG. 5

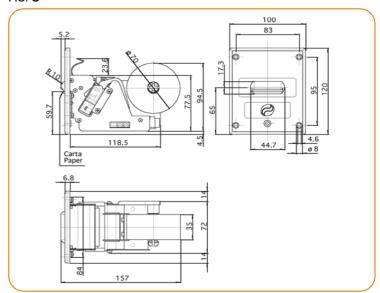

MODEL	TG35	TG58
RESOLUTION	200 DPI (8DOT/мм)	
PAPER ROLL SIZE	35 мм +/- 1 мм Ø 70 мм	58 MM +/- 1 MM Ø 50 MM MAX
PRINT SPEED	42 MM/SEC PRINT; 60 MM/SEC IN PAPER ADVANCE	
STANDARD INTERFACES	SERIAL RS232, TTL	
POWER SUPPLY	SINGLE, RANGE OF FROM 9 TO 13 VDC	
ELETTRICAL INPUT		
PRINT CURRENT	1,5A	
STAND BY CURRENT	50MA	
ENVIRONMENTAL CONDIT	ions	
OPERATING	0°C - 50° C	
TEMPERATURE		
OPERATING	20% - 85%	
HUMIDITY		
STORAGE TEMPERATURE/	-25°C + 70°C	
HUMIDITY	10% - 80%	
OPTIONS	FRONT PANEL IN ABS FOR TG35 E TG58	
	•KIT FOR CUSTOMIZING MESSAGES AND	
	HEADINGS; PRINTER PROGRAMMING INCLUDING CONNECTOR CABLE TO PC	