


(a)AT PB-AT003/F

Card Type 1 Parallel, 2 Serial
 Chip Set 82C11, 16450
 Data Bus 8-bit ISA

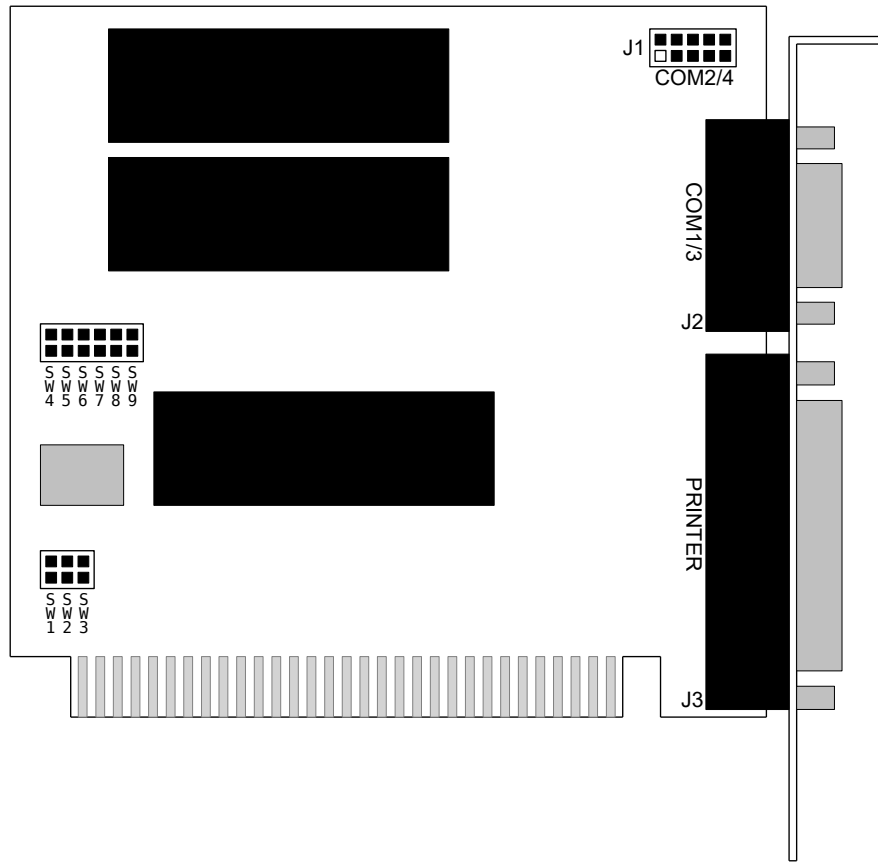

CONNECTIONS			
Function	Label	Function	Label
Serial COM2 or COM4 port	J1	Serial COM1 or COM3 port	J2
Parallel printer port LPT1 or LPT2	J3		

USER CONFIGURABLE SETTINGS			
Function	Position	ON	OFF
Printer port selection	SW1	LPT1	LPT2
Serial ports selection	SW2	COM1 & COM2	COM3 & COM4
Active serial port count	SW3	2 serial ports	1 serial port
Serial port 1 (J2) select IRQ4 (default)	SW4	IRQ4	
Serial port 1 (J2) select IRQ3	SW5	IRQ3	
Serial port 2 (J1) select IRQ4	SW6	IRQ4	
Serial port 2 (J1) select IRQ3 (default)	SW7	IRQ3	
Parallel port (J3) select IRQ7 (LPT1, default)	SW8	IRQ7	
Parallel port (J3) select IRQ5 (LPT2)	SW9	IRQ5	