


The DPM 2000 uses advanced components and construction techniques to provide an unrivalled combination of high performance, elegant appearance and low cost. The module uses a bandgap reference for extra temperature stability. For single rail operation, the DPM 2000S features a built-in negative rail generator, enabling the meter to measure a signal referenced to its own power supply 0V.

- 15mm (0.6”) Digit Height
- Programmable Decimal Points
- Auto-zero
- Auto-polarity
- 200mV d.c. Full Scale Reading (F.S.R.)
- Single Rail Version

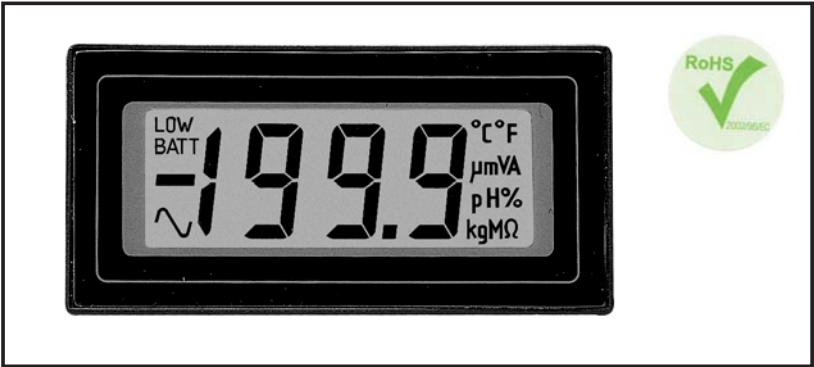

SCALING

Two resistors Ra and Rb may be fitted in order to alter the full scale reading (F.S.R) of the meter - see table. The meter will need re-calibration.

Required F.S.R.		Ra	Rb
2V	Note	910k	100k
20V	Note	1M	10k
200V	Note	1M	1k
2kV	Note	1M	100R
200μA		link	1k
2mA		link	100R
20mA		link	10R
200mA		link	1R

NOTE  
Ensure that link 10 is open if fitting Ra.

Standard Meter Single Rail Version				Stock Number DPM 2000 DPM 2000S	
Specification	Min.	Typ.	Max.	Unit	
Accuracy (overall error) *		0.05	0.1	% (±1 count)	
Linearity			±1	count	
Sample rate		3		samples/sec	
Operating temperature range	0		50	°C	
Temperature stability		30		ppm/°C	
Supply voltage (V+ to V-)	DPM 2000	7.5	9	14	V
	DPM 2000S	3.5	5	6.5	
Supply current	DPM 2000	150			μA
	DPM 2000S	500			
Input leakage current (Vin = 0V)		1	10		pA

\* To ensure maximum accuracy, re-calibrate periodically.

SAFETY

To comply with the Low Voltage Directive (LVD 93/68/EEC), input voltages to the module’s pins must not exceed 60Vdc. If voltages to the measuring inputs do exceed 60Vdc, then fit scaling resistors externally to the module. The user must ensure that the incorporation of the DPM into the user’s equipment conforms to the relevant sections of BS EN 61010 (Safety Requirements for Electrical Equipment for Measuring, Control and Laboratory Use).

DIMENSIONS All dimensions in mm (inches)

72.0 (2.83)

36.0 (1.42)

1888

Display in TEST mode

67.5 (2.66)

60.0 (2.36)

Ø2.50 (0.10)

32.5 (1.28)

27.5 (1.08)

19.0 (0.75)

29.5 (1.16)

53.0 (2.09)

62.5 (2.46)

a

b

c

d

e

9

6

11

4

2

7

8

12

13

14

1

3

5

10

Rb

Ra

ON BOARD  
SOLDER LINKS

SCALING RESISTORS

LMP

pH

μA

V

°C

°F

m

Ω

M

K

DPT

DPT

DPT

IL

IH

TEST

XB3

XDP

SV

CLK

XC3

V+

RBC

REF

REF+

E3

BP

AB

POL

REF HI

REF LO

COM

a. 1.00 (0.04)

b. 9.00 (0.35)

c. 1.25 (0.05)

d. 5.50 (0.22)

e. 4.00 (0.16)

f. 0.50 (0.02)

g. 2.54 (0.10)

## PIN FUNCTIONS



- |               |  |
|---------------|--|
| 1. V-         | Negative power supply connection.  |
| 2. IH         | Positive measuring input.  |
| 3. IL         | Negative measuring input.  |
| 4. COM        | The ground for the analogue section of the A/D converter, held actively at 2.8V (nom.) below V+. COM must not be allowed to sink excessive current (>100µA) by connecting it directly to a higher voltage.   |
| 5. REFLO      | Negative input for reference voltage.  |
| 6. REFHI      | Positive input for reference voltage (connected via Link 1 to REF+).   |
| 7. POL        | Drive for negative (-) annunciator. Internally connected via Link 11 to the annunciator.   |
| 8, 10, 15, 19 | Outputs for autoranging applications.  |
| 9. BP         | LCD back plane drive waveform.   |
| 11. REF+      | Positive output from internal reference (connected via Link 1 to REF HI).  |
| 12. REF-      | Negative output from internal reference. MUST be tied to a suitable ground return to bias bandgap (normally COM).  |
| 13. RBG       | Output of bandgap reference (1.22V nom).   |
| 14. V+        | Positive power supply connection.  |
| 16. CLOCK     | Clock output. May be used for systems timing or as an input to override the internal oscillator and control the sample rate.   |
| 17. -5V       | Output from negative rail generator circuit (DPM 2000S only). This is an inversion of V+.  |
| 18. XDP       | Connect to required annunciators/DPs (see Special Note - Annunciators).  |
| 20. TEST      | Connect to V+ to momentarily turn on segments as illustrated. It should not be operated for more than a few seconds as the D.C. voltage applied to the LCD may 'burn' the display. This pin is 5V (nom) below V+ and is the ground for the digital section of the meter. |
- It can be used to power external logic up to a maximum of 1mA.

## SPECIAL NOTE - ANNUNCIATORS.

The DPM annunciators (DPs, °C, etc.) can be displayed either by connecting to XDP or by applying a solder blob link to the XDP pads located under the annunciator input pads. However, as these annunciators are normally 'floating', under certain conditions they may appear when not wanted. To suppress unwanted annunciators, apply a solder blob to the backplane pads located in-between the annunciator input pads.


If the annunciators are being switched, connect them via MΩ resistor to the BP (Pin 9), the annunciators will then operate normally when connected to XDP. Ensure that an annunciator is not connected directly to the XDP and BP at the same time.

Note - if suppressing POL (-) annunciator by direct connection to BP then Link 11 MUST be cut first.




## VARIOUS OPERATING MODES

**ON-BOARD LINKS:** In order to quickly and easily change operating modes for different applications, the meter has several on-board links. They are designed to be easily opened (cut) or shorted (soldered). Do not connect more than one meter to the same power supply if the meters cannot use the same signal ground. Taking any input beyond the power supply rails will damage the meter.




Check Links 2, 3 & 4 are SHORTED.

Measuring a floating voltage source of 200mV full scale.




Check Links 2, 3 & 4 are SHORTED.

Measuring current (supply MUST be isolated).

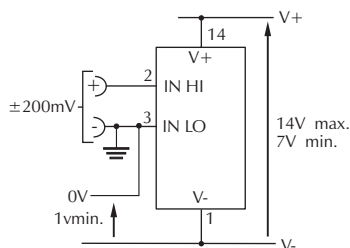

Check Links 3 & 4 are SHORTED.

Split supply operation (DPM 2000).




Check Link 1 is OPEN.

Measuring the ratio of two voltages.

Reading = 1000 V<sub>1</sub>/V<sub>2</sub>


50mV < V<sub>2</sub> < 200mV

V<sub>1</sub> < 2V<sub>2</sub>.



Check Links 3 & 4 are SHORTED.

Measuring a single ended input referenced to supply (DPM 2000S).



Check Links 3 & 4 are SHORTED.

Measuring 4-20mA to read 0-999

(supply MUST be isolated).